



Adams 2024.2

Installation and Operations Guide

Corporate Office

Hexagon Manufacturing Intelligence
78 Portsmouth Road Cedar House
Cobham, Surrey KT11 1HY
United Kingdom
Telephone: (+44) 02070686555

Worldwide Web

<http://www.hexagon.com>

Support

<http://simcompanion.hexagon.com/>

Disclaimer

This documentation, as well as the software described in it, is furnished under license and may be used only in accordance with the terms of such license.

Hexagon reserves the right to make changes in specifications and other information contained in this document without prior notice.

The concepts, methods, and examples presented in this text are for illustrative and educational purposes only, and are not intended to be exhaustive or to apply to any particular engineering problem or design. Hexagon assumes no liability or responsibility to any person or company for direct or indirect damages resulting from the use of any information contained herein.

User Documentation: Copyright © 2024 Hexagon AB and/or its subsidiaries. All Rights Reserved.

This notice shall be marked on any reproduction of this documentation, in whole or in part. Any reproduction or distribution of this document, in whole or in part, without the prior written consent of Hexagon is prohibited.

This software may contain certain third-party software that is protected by copyright and licensed from third party licensors. Additional terms and conditions and/or notices may apply for certain third party software. Such additional third party software terms and conditions and/or notices may be set forth in documentation and/or at [Third party software information](#) (or successor website designated by Hexagon from time to time). Portions of this software are owned by Siemens Product Lifecycle Management, Inc. © Copyright 2024.

The Hexagon logo, Hexagon, MSC, MSC Adams, MD Adams, and Adams are trademarks or registered trademarks of Hexagon AB and/or its subsidiaries in the United States and/or other countries. FLEXIm and FlexNet Publisher are trademarks or registered trademarks of Flexera Software. Parasolid is a registered trademark of Siemens Product Lifecycle Management, Inc.

All other trademarks are the property of their respective owners.

ADAM:V2024.2:Z:Z:Z:DC-OPS-PDF

Adams 2024.2 Installation Guide

Adams 2024.2 Installation Guide	1
Preface	8
About Hexagon	9
Overview	9
About Virtual Product Development and Adams	9
Technical Support	10
Web	10
Phone and Email	13
Training	13
Course Information and Registration	13
Internet Resources	14
	15
Getting Started	15
Overview	16
Welcome to Adams Products	17
What You Need	18
Types of Installations	19
Product Categories	20
Getting Help	21
	22
Hardware and Software Configurations	22
Overview	23
Hardware and Software Specifications	24
System Requirements	27

Graphics Requirements	28
Adams Certified Hardware	29
Licensing Requirements	32
Dropped Platforms	33
	34
Installing Adams on Linux	34
Overview	35
Required packages in Linux	35
Preparing to Install the Adams Product	36
Creating the Installation Directory	37
To create the installation directory:	37
Installing Adams	38
Available Options:	38
Scenario 1:	47
Scenario 2:	48
Scenario 3:	48
Installing the Adams Controls Thin Client	49
To install the Adams Controls Thin Client:	49
Installing the Adams Extension for Easy5	50
To install the Adams extension for Easy5:	50
To configure your computer to run licensed exported Easy5 models within Adams:	50
Installing on a Heterogeneous Network	52
To install Adams on a heterogeneous network:	52
	53
Licensing on Linux	53
Overview	54

About the Adams License Server	55
Tips for Selecting a License Server	55
About a Three-Server Configuration	55
Licensing Adams When File and License Server Are Same Machine	56
To set up licensing:	56
Licensing Adams When File and License Server Are Different Systems	57
Starting the Adams License Server	58
To restart the Adams license server:	58
Restarting the Adams License Daemons	59
To restart the Adams license daemons:	59
Changing the License to Point to a Different License Server	60
Verifying a Successful License	61
	62
Installing Adams on Windows	62
Overview	63
Installing Adams	63
To install Adams:	63
Installing the Adams Controls Thin Client	74
To install the Adams Controls Thin Client:	74
Installing the Adams Extension for Easy5	75
To install the Adams extension for Easy5:	75
To manually install the Adams Controls Extension:	75
To configure your computer to run licensed exported Easy5 models within Adams:	76
To apply the value of the environment variable:	77
Installing Adams in Silent Mode (Batch)	78
To create the batch setup file:	78

	80
Licensing on Windows	80
Overview	81
Licensing Basics	82
Specifying your License	83
To specify or modify Adams licensing:	83
Replacing Codes (Licenses) on an Existing Windows Server	84
To update your passwords:	84
Customizing End-User License Administration	85
	86
Running Adams Products	86
Starting Adams Products	87
Starting Adams Products on Linux	87
Adams Toolbar	87
To start a product on Linux:	87
Starting Adams Products on Windows	88
To start a product on Windows:	88
To start a product from DOS shell in Windows:	89
Navigation to Edit Environment Variables	89
Setting Preferences	91
Setting Preferences on Linux	91
To display the Registry Editor:	91
Setting Preferences on Windows	91
To display the Settings dialog box:	91
Setting Your Working Directory	92
To set your working directory:	92

Using Distributed Computing for Nonlinear Adams Flex Bodies	93
Overview	93
Adams- NLFE Client Manager	94
Starting Adams - NLFE Client Manager	94
Starting Adams - NLFE Client Manager	95
Starting a Starter Daemon	95
IP Address and Port Number of Directory Service and Starter Daemon	96
High Performance Computing Considerations	98
Intel® SpeedStep for Windows 10	98
Intel® Hyper-Threading Technology	98
	99
Linux Administration and Configuration	99
Overview	100
Setting Up the Client Machine	101
To set up a client machine:	101
Updating Passwords	102
Using the Adams Installation Script	102
To update passwords using the installation script:	102
Updating Outside the Installation Script	102
To update passwords outside the installation script:	102
Troubleshooting	104
Overview	105
Troubleshooting on Windows	106
Generating Problem Reports	106
To generate and review a report:	106
Obtaining New Passwords	106

Windows Security Alert	106
Windows Security Alert	107
Non-ASCII Character User Names	107
Font Cache Directory	107
Troubleshooting on Linux	109
To generate a problem report:	109
To check hostid on the system:	109
Obtaining New Passwords	109
About License Server System Resources	109
Allocating Disk Space for Temporary Files	110
	111
Linux Installation Roadmaps	111
Overview	112
File Server, License Server, and Client - Same Machine	113
File Server and License Server - Same Machine, Client - Different Machine	114
File Server and Client - Same Machine, License Server - Different Machine	115
File Server, License Server, and Client - Different Machines	116
File Server - Different Machine, License Server and Client - Same Machine	117
Different Linux Platforms - Heterogeneous Network	118
	119
dSPACE SCALEXIO® Configuration guide for Adams Real Time	119
	128
Adams Licensing Configurations for Real Time Systems	128
Licensing Configuration options	129
Node-Locked License File	129
Licensing Server on Different Machine from the Real Time System	129

Licensing Server Installed on the Real Time System	129
MSC Licensing Usage Reporting Tool	130

Preface

- [About Hexagon](#)
- [Technical Support](#)
- [Internet Resources](#)

About Hexagon

Overview

Hexagon is the leading global provider of virtual product development (VPD) tools, including simulation software and professional services. Hexagon helps companies make money, save time, and reduce costs associated with designing, testing, producing, and supporting manufactured products.

Hexagon works with thousands of companies worldwide, in hundreds of industries, to develop better products faster by using information technology, software, and services to enhance and automate the product design and manufacturing process. Simulating your product performance reduces development costs, time to market, and warranty costs.

About Virtual Product Development and Adams

You've heard it before: manufacturing companies today face intense global competition, demanding customers, fragmented markets, increasing product complexity, compressed product cycles, price and profit pressures, strict regulatory and liability environments, systems integration and supply chain issues, skyrocketing costs of testing and physical prototyping, and on and on...

What you don't often hear, though, is a strategy for enabling your company to improve your new product development process to meet these challenges.

Whether you are delivering airplanes, automobiles, ships, biomedical devices, golf clubs or children's toys to your customers, Hexagon goal is to help you improve your new product development process, allowing you to be significantly better at your concept development, design, testing, and production activities through the application of VPD.

VPD is an environment that uses an integrated combination of both simulation software technology and traditional techniques to design, test, manufacture, and support products. The result is that cost-effective designs that meet all performance, safety, durability, and reliability requirements can be brought to market in less time and for less cost.

Adams, as part of VPD, is focused on enhancing your ability to make better product development decisions, explore innovative design alternatives, and consistently get the product right. It is the world's most widely used mechanical system simulation software. It enables you to produce virtual prototypes, realistically simulating the full-motion behavior of complex mechanical systems on your computers and quickly analyzing multiple design variations until an optimal design is achieved. This reduces the number of costly physical prototypes, improves design quality, and dramatically reduces product development time.

Technical Support

For help with installing or using an Hexagon product, contact Hexagon technical support. Our technical support provides technical assistance on questions related to installation and use of the software. For further details please see the Technical Support Usage Guide, which is accessible via our support web site.


You can reach Hexagon technical support on the web, by telephone, or e-mail.

Web

Go to the Hexagon web site at www.hexagon.com, scroll down and click on *Services & Training*. Here, you can find a wide variety of support resources including Product Updates, Discussions, Technical Articles, and Documentation updates.

In addition, we provide several excellent sources of online information:

- *SimCompanion*: Find solutions to problems in this repository of troubleshooting tips, examples, and frequently asked questions. To access the SimCompanion, go to: <https://simcompanion.hexagon.com/>
- *Nexus*: Find support resources including Knowledge Hub, Community forums, Documentation Center. Go to <https://nexus.hexagon.com/home/>. Click **Sign In**.

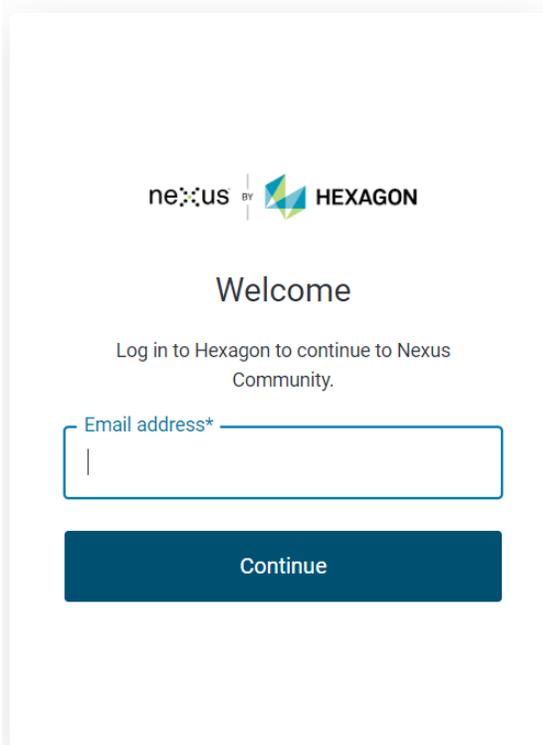

nexus BY HEXAGON

Welcome


Log in to Hexagon to continue to Nexus Community.

Email address*


Continue

Preface

Click  to add a product.

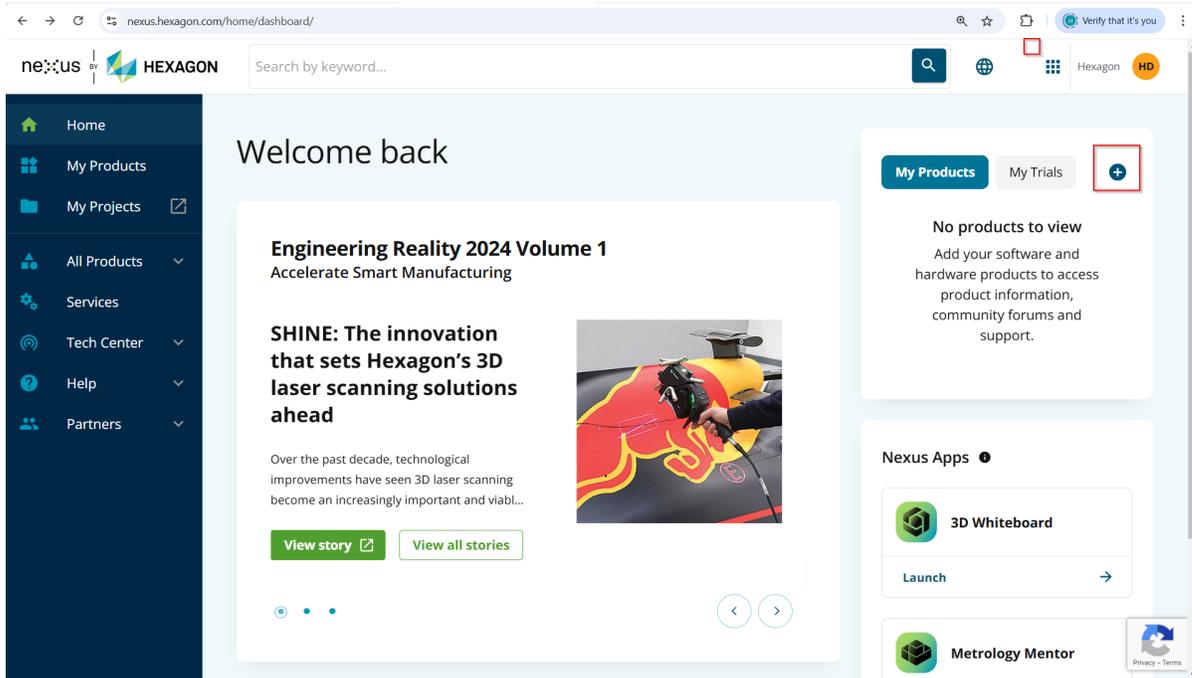


Select **Software(s)** and select **Adams** from the dropdown list of displayed products.

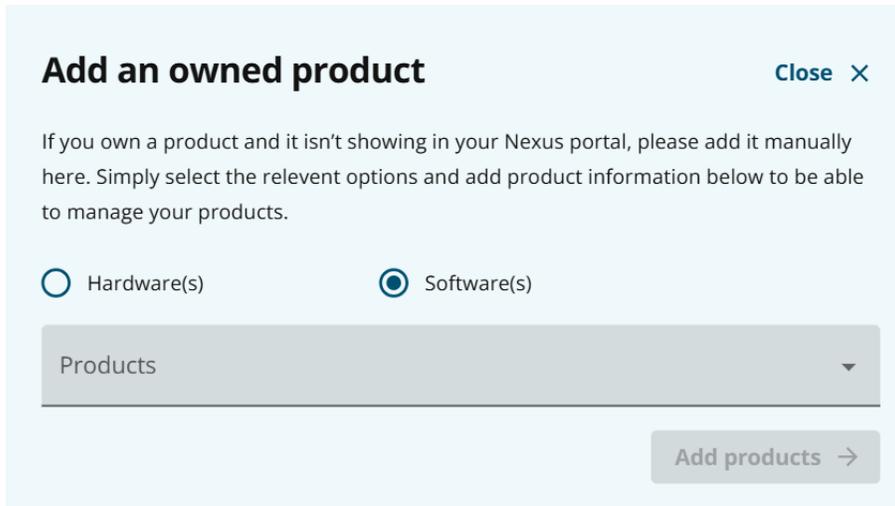


Preface

Adams is added to **My Products**.

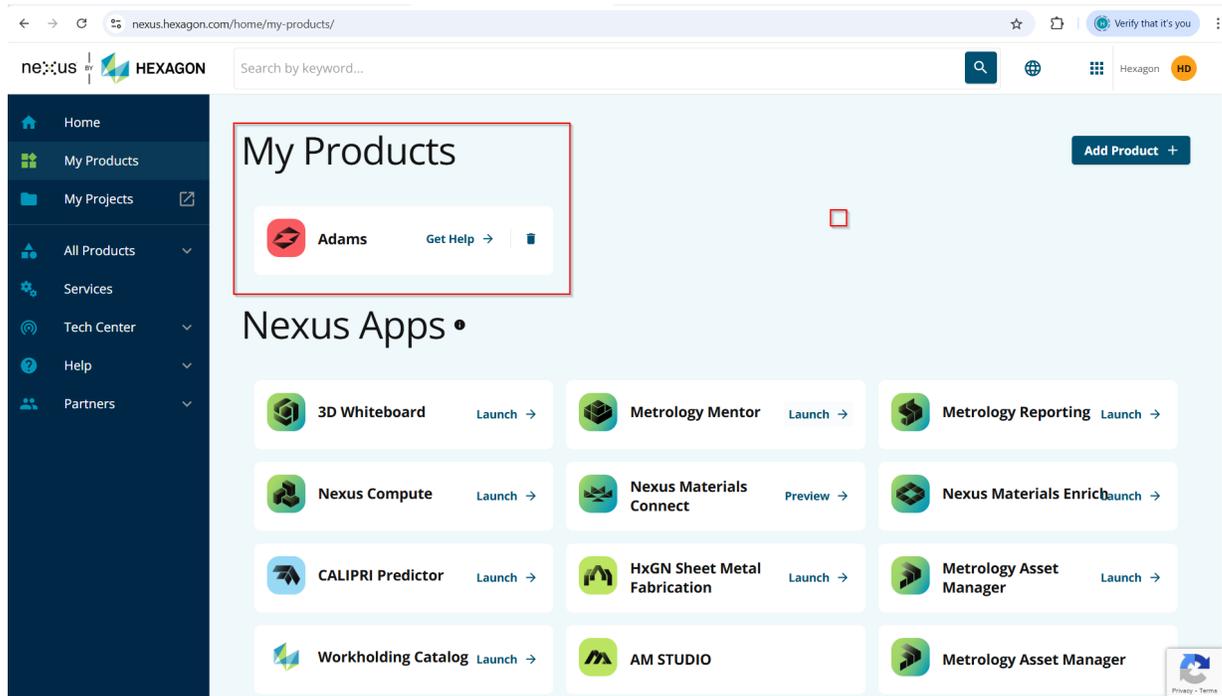

Click on **Get Help** to access **Knowledge hub**, **Community forums**, and **Documentation Center**.

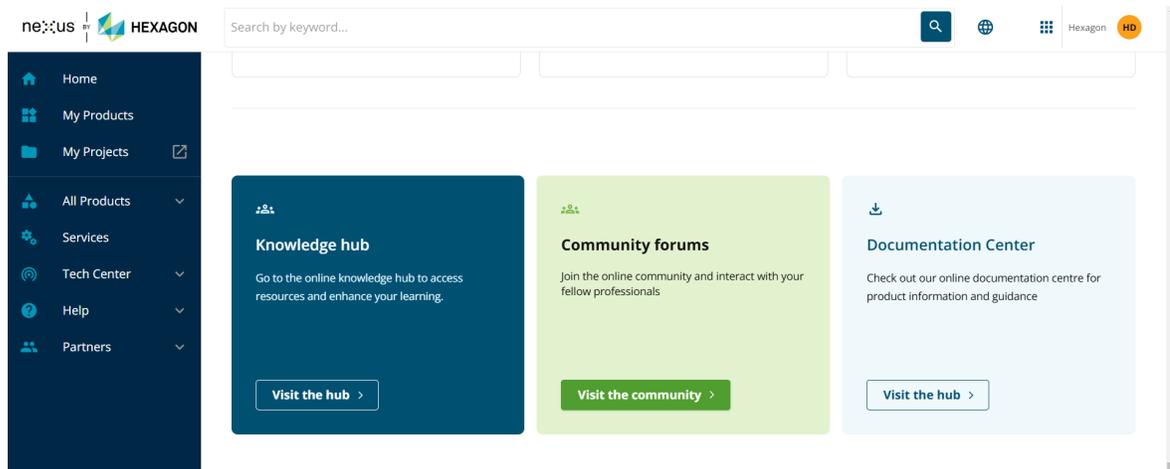


Note:

Alternatively, you can access this page by going to <https://nexus.hexagon.com/home/dashboard/> and clicking My Products, select Software, and then select Adams.

- **Knowledge hub** to access resources such as technical articles and enhance your learning
- **Community forums** when you are looking for peer support, as well as technical expertise. Many of our consultants, developers, and technical support staff monitor the forums. To sign up for the

Preface

forums, go to [Adams - Nexus Community](#) and view the Adams discussions in the Community Forums.

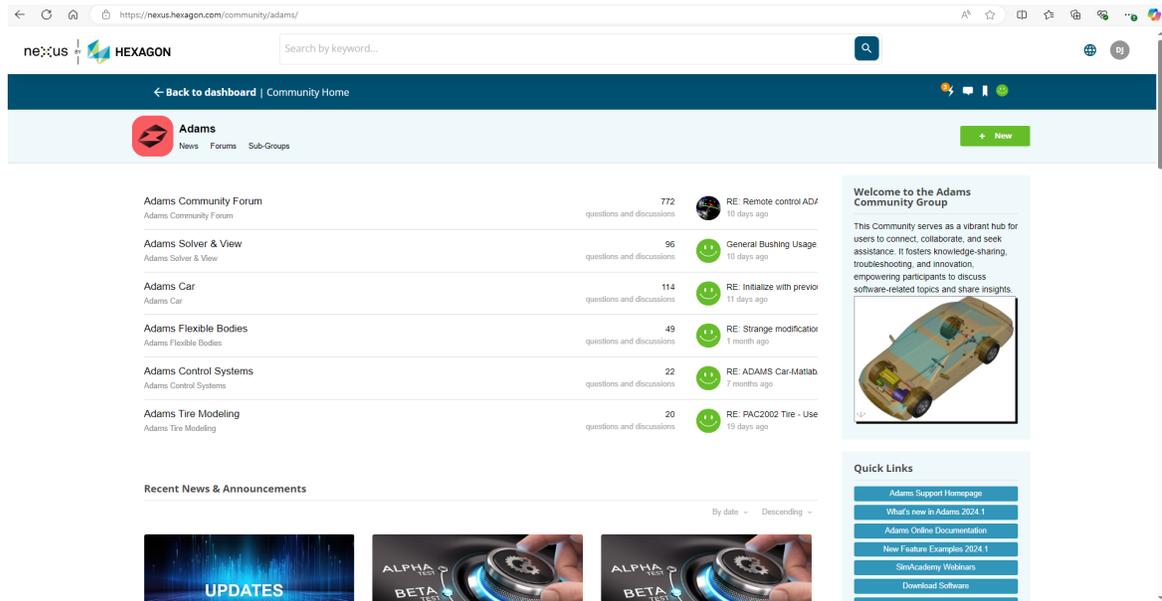

The screenshot shows the Adams Community Forum interface. At the top, there is a navigation bar with 'Back to dashboard | Community Home' and a search bar. Below this, the forum categories are listed with their respective counts and recent activity. A 'Welcome to the Adams Community Group' message is displayed on the right, along with a 'Quick Links' section containing links to support, documentation, and software.

- **Documentation Center** for product information and guidance To view the documentation, go to [Adams - Documentation Center](#)

Phone and Email

For a current list of phone numbers and language based email addresses please visit our support [web site](#).

Training

Hexagon training provides comprehensive training in Virtual Product Development. We offer standard and customized training courses in the application of CAE tools to solve from basic to complex problems within any industry. We offer over 100 courses in our state-of-the-art classroom facilities and individual computer graphics laboratories at training centers throughout the world. All of our courses emphasize hands-on computer laboratory work to facilitate skills development. We are uniquely positioned to optimize your investment in design and simulation software tools.

Our industry experienced expert staff is available to customize our course offerings to meet your unique training requirements. For the most effective training, we also offer many of our courses at our customer's facilities.

We specialize in customized training based on our evaluation of your design and simulation processes, which yields courses that are geared to your business. In addition to traditional instructor-led classes, we also offer video courses, interactive multimedia training, web-based training, and a specialized instructor's program.

Course Information and Registration

For detailed course descriptions, schedule information, and registration call the Training Specialist at +1 800 426-1066 or visit [www.hexagon.com](#).

Internet Resources

[Hexagon \(www.Hexagon.com\)](http://www.Hexagon.com)

Hexagon corporate site with information on the latest events, products and services for the CAD/CAE/CAM marketplace.

1

Getting Started

- [Overview](#)
- [Welcome to Adams Products](#)
- [What You Need](#)
- [Types of Installations](#)
- [Product Categories](#)
- [Getting Help](#)

Overview

This chapter describes what you need to know and have available to install the Adams 2024.2[®] suite of software. It contains the sections:

- [Welcome to Adams Products on the next page](#)
- [What You Need on page 18](#)
- [Types of Installations on page 19](#)
- [Product Categories on page 20](#)
- [Getting Help on page 21](#)

Welcome to Adams Products

Adams products provide you with tools to model, simulate, and optimize your mechanical systems. This guide explains how to install and license the Adams products, and gives you troubleshooting tips if you have any problems during an installation.

What You Need

Before you start installing Adams products, there are a few things that you should be sure to do or have available:

- Check to ensure that your system meets the requirements detailed in the [Hardware and Software Specifications on page 24](#). There, you will find Operating System, Compiler, Graphics, Licensing, Memory and Disk Space requirements. Please review these requirements before beginning your installation of Adams.
- Hexagon License Electronic Mail. Authorization codes are e-mailed to you by Hexagon. The Adams applications will not run without proper authorization codes. Following the instructions in the e-mail, you can export these codes to a file and use them as input to the installation process.
- Obtain any Adams software updates at the Hexagon Technical Support Web site at <http://simcompanion.hexagon.com>.

About Your Adams Licenses

To run the Adams products, you need the authorization codes electronically mailed to you by Hexagon. When you receive this e-mail, copy it's contents to a file as explained in the e-mail message. The actual authorization codes are contained between the lines:

```
# ----- Start of License File -----
```

and

```
# ----- End of License File -----
```

You should only copy the contents of the e-mail between these two lines to a file. This file can be used as input to the installation process.

If you have an existing MSC license, you may not receive a new set of authorization codes. However, you will need to know the name of the license server and the TCP port number used by the MSC license manager on that license server.

About the Adams Media

You will receive your Adams media in the form of an electronic download. All the files required to install the Adams products will be contained in this media. There is a unique download for each supported Adams platform. To install Adams for multiple supported platforms, you will have to run the installation process multiple times with requisite platform installer.

Types of Installations

The way in which you install and license the Adams products depends on your installation configuration.

Any given installation configuration is composed of the following three components:

- **File server** - Machine that contains the Adams files. It may be shared with other computers on a network.
- **License Server** - Machine that runs the Adams license server. The licensing of Adams products depends on the type of license you purchased.
- **Client** - Machine that runs the Adams products.

You can manage these three components on one machine, three different machines, or any combination of machines. You can also install Adams products on a heterogeneous network where you install Adams products for different platforms all on one network. For information on the various Linux configurations, see [on page 111](#).

Product Categories

The product(s) or feature package you are licensed to use for Adams appear on the first page of your password certificate under the section Feature/Password. When you install the products, select the packages that you are licensed for.

Getting Help

If you have questions or problems installing or testing your Adams products, refer to [Troubleshooting on page 104](#). If the problems persist, go to the Technical Articles or Known Issues at <http://simcompanion.hexagon.com/>. If the problems still persist, call Hexagon Technical Support. For a current list of phone numbers and language-based email addresses please visit our web site <http://www.hexagon.com>, scroll down and click on *Services* → *Technical Support (SimCompanion)*, on the SimCompanion webpage select *Support* → *Support Contact Information*. Before contacting Technical Support, please have the following information available:

- Hardware type (be as specific as possible)
- Version of the operating system, including build number and service packs, if applicable
- Version of compilers
- Hardcopy of all error messages (you can send it by fax or through e-mail)

If possible, generate a troubleshooting report as explained in [Generating Problem Reports on page 106](#).

2 Hardware and Software Configurations

- [Overview](#)
- [Hardware and Software Specifications](#)
- [System Requirements](#)
- [Graphics Requirements](#)
- [Adams Certified Hardware](#)
- [Licensing Requirements](#)
- [Dropped Platforms](#)

Overview

This chapter provides the hardware and software configurations for Adams.

Note:

For the latest version of the hardware and software specifications, see the Adams Support site at <http://simcompanion.hexagon.com>

This chapter includes the following sections:

- [Hardware and Software Specifications on the next page](#)
- [System Requirements on page 27](#)
- [Graphics Requirements on page 28](#)
- [Adams Certified Hardware on page 29](#)
- [Licensing Requirements on page 32](#)
- [Dropped Platforms on page 33](#)

Hardware and Software Specifications

[Table 3-1](#) outlines the hardware and software specifications for Adams.

Table 3-1 Hardware and Software Specifications

Hardware Vendor	Models and Processors	Operating System	Fortran	C/C++
Intel & AMD x86-64 Linux	Intel Pentium 4, Pentium D, Core2 Duo, Xeon, and compatibles	Red Hat Enterprise Linux 8.8 x64 (Kernel 4.18.0-513.18.1.el8_9.x86_64)	Intel one API 2023.1 Version 2021.9.0 Build 20230302	Intel one API 2023.1 Version 2021.9.0 Build 20230302
		Red Hat Enterprise Linux 9.2 x64 (Kernel 5.14.0-284.30.1.el9_2.x86_64)		
		SUSE Linux Enterprise Server 15 SP4 (Kernel 5.14.21-150400.24.100- default)		
Intel & AMD x86-64 Windows	Intel Pentium 4, Pentium D, Core 2 Duo, Xeon, and compatibles	Windows 10 Enterprise 22H2 (OS Build 19045.4291)	Intel one API 2023.1 Version 2023.1.0 Build 20230320	Microsoft Visual Studio Professional 2022 Version 17.6.10
		Windows 11 Enterprise 22H2 (OS Build 22621.3447)		
		Windows Server 2022 22H2		

Notes:	<ol style="list-style-type: none"> 1. Intel IA-32 and x64 processors: Pentium (4, D), Core (i3, i5, i7), Xeon and AMD compatibles. 2. Adams 2024.2 product developed using the 'Intel Composer Edition' compiler. 3. Adams Controls is supported on these platforms. However, partner product support varies. Please see the Supported Versions of Integration Products section of the Adams product Release Guide. 4. Conditions under which compilers are required are listed below in Table 3-1 outlines the hardware and software specifications for Adams. section. 5. For the latest information on supported platforms for upcoming releases of MSC products, please visit the following web site: http://www.hexagon.com/platform-support/ 6. Adams officially supports the Professional Edition of Microsoft Visual Studio, but the Community Edition has been found to function in the following scenarios: <ul style="list-style-type: none"> • DLL generation for user-written subroutines in C or in C and Fortran • Some Adams Controls scenarios with MATLAB/Simulink, Easy5 and FMI compliant software. For details, please see the Supported Versions of Integration Products section of the Adams product Release Guide.
--------	--

Hardware and Software Configurations

The required compiler versions for this version of Adams are found in the [Hardware and Software Specifications](#) section. The conditions under which compilers are required and any deviations to the generally required versions are listed below:

Table 3-2 Intel & AMD x86-64 Windows

Adams Controls and Adams Mechatronics	FORTRAN Compiler	C/C++ Compiler
User Subroutines	Required	Required
with Easy5		
Function Evaluation	Not required by Adams*	Not required by Adams^
Co-Sim	Not required by Adams*	Not required by Adams^
ESL Import	Not required by Adams**	Not required by Adams^
with MATLAB/Simulink®		
Function Evaluation	Not required by Adams	Not required by Adams#
Co-Sim	Not required by Adams	Not required by Adams#
ESL Import	Not required by Adams	Not required by Adams##
with FMI		
Co-Sim	Not required by Adams\$	Required for exporting V1 Adams FMU\$\$
Model Exchange/Import	Not required by Adams\$	Not required by Adams\$\$

*Easy5 requires Intel® Fortran

**Easy5 requires GNU Compiler Collection or Intel® Fortran; Intel® recommended

^Easy5 requires Visual Studio linker; note that some FORTRAN compiler environments include this

#MATLAB/Simulink® may require it under some circumstances; check with The MathWorks, Inc. for compiler requirements

##MATLAB/Simulink® requires it for building the .dll to be exported; check with The MathWorks, Inc. for compiler requirements

\$FMI with Easy5 requires GNU Compiler Collection or Intel® compiler

\$\$FMI with Easy5 requires GNU Compiler Collection or Visual Studio C compiler

Table 3-3 Intel & AMD x86-64 Linux

Adams Controls and Adams Mechatronics	FORTRAN Compiler	C/C++ Compiler
User Subroutines	Required	Required
with Easy5		

Hardware and Software Configurations

Adams Controls and Adams Mechatronics	FORTRAN Compiler	C/C++ Compiler
Function	Not required by Adams*	Not required by Adams
Co-Sim	Not required by Adams*	Not required by Adams
ESL Import	Not required by Adams**	Not required by Adams
with MATLAB/Simulink®		
Function	Not required by Adams	Not required by Adams#
Co-Sim	Not required by Adams	Not required by Adams#
ESL Import	Not required by Adams	Not required by Adams##
with FMI		
Co-Sim	Not required by Adams\$	Required for exporting V1 Adams FMU\$
Model Exchange/Import	Not required by Adams\$	Not required by Adams\$

*Easy5 requires Intel® Fortran

**Easy5 requires GNU Compiler Collection or Intel® Fortran; Intel® recommended

#MATLAB/Simulink® may require it under some circumstances; check with The MathWorks, Inc. for compiler requirements

##MATLAB/Simulink® requires it for building the .dll to be exported; check with The MathWorks, Inc. for compiler requirements

\$FMI with Easy5 requires GNU Compiler Collection or Intel® compiler

System Requirements

[Table 3-1](#) shows the system requirements for Adams.

Table 3-1 System Requirements

Platform	Operating System	Disk Space	Memory and Swap Space
Intel & AMD x86-64 Linux	Red Hat Enterprise Linux 8.8 x64 (Kernel 4.18.0- 513.18.1.el8_9.x86_64)	15 Gb	1 Gb Minimum 2 Gb Recommended Swap = 2 x RAM
	Red Hat Enterprise Linux 9.2 x64 (Kernel 5.14.0- 284.30.1.el9_2.x86_64)		
	SUSE Linux Enterprise Server 15 SP4 (Kernel 5.14.21- 150400.24.100-default)		
Intel & AMD x86-64 Windows	Windows 10 Enterprise 22H2 (OS Build 19045.4291)	9 Gb	1 Gb Minimum 2 Gb Recommended Swap = 2 x RAM
	Windows 11 Enterprise 22H2 (OS Build 22621.3447)		
	Windows Server 2022 22H2		

Notes:	<ul style="list-style-type: none"> ■ Ubuntu Linux 20.04 and 22.04 are also supported, but only for standalone Adams Solver jobs including those that use Adams Controls and/or Adams Car Solver extensions. ■ The C shell (CSH) is required for the installation and use of Adams on Linux systems. Using another shell, such as bash, will result in unexpected behaviour. Certain Linux distributions, like Ubuntu, do not have the CSH package included in their default installation, necessitating its inclusion before proceeding with the installation of Adams. To install CSH, employ the following or a similar command: <i>yum install csh</i> ■ The K shell (KSH) is required for the use of some features in Adams like Viewflex and Maxflex on Linux systems. Some Linux systems may not include the KSH package in default installations. To Include KSH use the following or similar command: <i>yum install ksh</i>
---------------	---

Graphics Requirements

The following are the graphics requirements for Adams.

Table 3-1 Graphics Requirements

Platform	Operating System	System Runtime Libraries	Validated Graphics Hardware
Intel & AMD x86-64 Linux	<p>Red Hat Enterprise Linux 8.8 x64 (Kernel 4.18.0-513.18.1.el8_9.x86_64)</p> <p>Red Hat Enterprise Linux 9.2 x64 (Kernel 5.14.0-284.30.1.el9_2.x86_64)</p> <p>SUSE Linux Enterprise Server 15 SP4 (Kernel 5.14.21-150400.24.100-default)</p>	X11 and OpenGL 2.0+	<p>NVIDIA Graphics Driver - Quadro M2200 Version 515.76</p> <p>For RHEL 8.8 use NVIDIA Graphics Driver - Quadro M2200 Version 515.76</p> <p>For RHEL 9.2 use NVIDIA Graphics Driver - Quadro M2200 Version 515.76</p> <p>For SUSE15 SP4 use NVIDIA Graphics Driver - Quadro M2200 Version 515.76</p> <p>The Adams products have been developed in full compliance with OpenGL 2.0 and should run properly with graphics cards that adhere to the 2.0+ or later specification. Must install vendor supplied OpenGL video driver.</p>
Intel & AMD x86-64 Windows	<p>Windows 10 Enterprise 22H2 (OS Build 19045.4291)</p> <p>Windows 11 Enterprise 22H2 (OS Build 22621.3447)</p> <p>Windows Server 2022 22H2</p>	OpenGL 2.0+	<p>NVIDIA Graphics Driver - Version 462.3 Quadro M2200</p> <p>AMD Radeon™ Pro W6600M Graphics Driver - Version 31.0.12026.3004</p> <p>The Adams products have been developed in full compliance with OpenGL 2.0 and should run properly with graphics cards that adhere to the 2.0+ or later specification.</p> <p>Strictly avoid use of the CPU-integrated graphics hardware. Must install vendor supplied OpenGL video driver.</p>

Adams Certified Hardware

The following is a comprehensive list of certified hardware devices that are fully supported for use with Adams.

For Windows 10:

Brand-Model	CPU	GraphicsCard	GraphicsCard Driver
HPZBOOKFirefly G9	Intel i7-1265U 1.80 GHz	NVIDIA RTX A500	30.0.15.1298
HPZBookFuryG9	Inteli7-12850HX2.80 Ghz	NVIDIA RTX A2000	31.0.15.2667
HPZBookFuryG9	Inteli7-12850HX2.10 Ghz	NVIDIA RTX A3000	30.0.15.1298
HPZBookFuryG9	Inteli7-12850HX2.80 Ghz	AMD Radeon™ Pro W6600M	31.0.12026.3004
HPZBookStudioG9	Inteli7-12800H2.40 GHz	NVIDIA RTX A4500	31.0.15.2667
HPZBOOKFirefly G9	Intel i7-1265U 1.80 GHz	NVIDIA RTXT550	31.0.15.1713
DELLPrecision7865 Tower	AMD Ryzen ThreadripperPRO 5995WX	NVIDIA T400	31.0.15.2849
DELLPrecision7865 Tower	AMD Ryzen ThreadripperPRO 5995WX	NVIDIA RTX A2000	31.0.15.2849
Dell Precision 5860 Tower	Intel(R) Xeon(R) w5- 2565X 3.19 GHz	NVIDIA RTX 2000 Ada	31.0.15.5335
Dell Precision 5860- SPR-R	Intel(R) Xeon(R) w5- 2565X 3.19 GHz5995WX	NVIDIA RTX A4000	31.0.15.5324
HPZ8G5 Workstation	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2processors)	NVIDIARTX6000Ada Generation	31.0.15.3598
HPZ8G5 Workstation	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2 processors)	NVIDIA T400	31.0.15.3598
HPZ8G5	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2	AMDW6300LP	31.0.12026.7004

Hardware and Software Configurations

Brand-Model	CPU	GraphicsCard	GraphicsCard Driver
Workstation	processors)		
HPZ8G5 Workstation	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2 processors)	NVIDIA RTX A2000	31.0.15.3598
HPZ8G5 Workstation	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2 processors)	NVIDIA Geforce RTX 3060Ti	31.0.15.3598
HPZ8G5 Workstation	Intel(R)Xeon(R)Gold 6426Y-2.50 GHz (2processors)	NVIDIARTX400	31.0.15.5286
DELLPrecision7865 Tower	AMD Ryzen ThreadripperPRO 5995WX	AMDRadeonPro W7900	31.0.21018.1004
DELLPrecision7865 Tower	AMD Ryzen ThreadripperPRO 5995WX	AMDRadeonPro W7500	31.0.21018.1004
Dell Precision 7875 Workstation	AMD Ryzen Threadripper PRO 7965WX 24-Cores 4.20 GHz	NVIDIA RTX 5000 Ada GPU	31.0.15.5309
Dell Precision 7875 Workstation	AMD Ryzen Threadripper PRO 7965WX 24-Cores 4.20 GHz	NVIDIA RTX A1000 GPU	31.0.15.5335
Dell Precision 7875 Workstation	AMD Ryzen Threadripper PRO 7965WX 24-Cores 4.20 GHz	AMD Redeon PRO W7500 GPU	32.0.11020.16
Dell Precision 7960 Workstation	Intel Xeon® w7-3455 2.50 GHz	NVIDIA RTX A1000 GPU	31.0.15.5335
HPZbookPower G10	AMD Ryzen 7 PRO 7840HS w/Radeon 780M Graphics 3.80 GHz	NVIDIARTX2000Ada Generation	31.0.15.3696
HPZbookPower G10	Inteli9-13900H	NVIDIARTX2000Ada Generation	31.0.15.3696
HPZBookStudio G10	Inteli7-13800H	NVIDIARTX4000Ada Generation	31.0.15.3696
HPZBookFuryG10	Inteli9-13950HX	NVIDIARTX5000Ada Generation	31.0.15.3696
HPZBookFuryG10	Inteli9-13950HX	NVIDIARTX3500Ada Generation	31.0.15.2908

Hardware and Software Configurations

Brand-Model	CPU	GraphicsCard	GraphicsCard Driver
HP ZBook Studio G11 Mobile Workstation	Intel(R) Core(TM) Ultra 7 165H 1.40 GHz	NVIDIARTX3000Ada Generation Laptop GPU	31.0.15.3868
HP ZBook Studio G11 Mobile Workstation	Intel(R) Core(TM) Ultra 7 165H 1.40 GHz	NVIDIA RTX 2000 Ada Generation	31.0.15.3868
HP ZBook Studio G11 Mobile Workstation	Intel(R) Core(TM) Ultra 7 165H 1.40 GHz	NVIDIA RTX 1000 Ada Generation	31.0.15.3868
HPZ4G5 Workstation	Intel(R)Xeon® W-2455X3.19GHz	AMDRadeonPro W7600	31.0.21018.6011
HPZ4G5 Workstation	Intel(R)Xeon® W-2455X3.19GHz	NVIDIARTX4500Ada Generation	31.0.15.3770
HPZ4G5 Workstation	Intel(R)Xeon® W-2455X3.19GHz	NVIDIARTX400	31.0.15.5274
DellPrecision3581	i7-13800H	NVIDIA RTX A500	31.0.15.3799
DellPrecision7780	i7-13850HX	NVIDIARTX2000Ada Generation	31.0.15.3799
HPZ6G5A Workstation	AMD Ryzen Threadripper Pro 7955WX16cores	NVIDIA RTX A4000	31.0.15.3799
DellPrecision5860 Tower	Intel Xeon® w7-2495X 2.5GHz	NVIDIA T400	31.0.15.3799
DellPrecision5860 Tower	Intel Xeon® w5-2565X 3.19 GHz	NVIDIA RTX A400	31.0.15.5335
DellPrecision7960 Tower	Intel Xeon® w7-3455 2.5GHz	NVIDIARTXA2000 12GB	31.0.15.3799
Dell Precision 7960 Rack	Intel Xeon® (PLATINUM 8568Y+ 2.30 GHz (2 processors)	NVIDIA T400	32.0.15.5639

Licensing Requirements

Following are the Adams licensing requirements for obtaining a node locked license file. Note that when obtaining licenses from a server, this version of Adams requires access to MSC License Server (FLEXlm) v11.13 or greater (installed separately).

Table 3-1 Licensing Requirements

Platform	Hostname Retrieval	Host ID Retrieval
Intel & AMD x86-64 Linux	From a shell window, enter the command: <i>hostname</i>	From a shell window, enter the command: <i>/sbin/ifconfig eth0</i> Return the information in the line labeled "HW addr" and remove the colons ":".
Intel & AMD x86 and x86-64 Windows	From a "Command Prompt" window, enter the command: <i>hostname</i>	From a "Command Prompt" window, enter the command: <i>ipconfig /all</i> Return the information in the line labeled "Physical Address".

Dropped Platforms

Each release we review the platforms and operating system changes by our partners and in the industry, and address these changes in our release. We make this information available to you for hardware planning. We welcome your input on platform support. Please communicate platform support needs to your Hexagon Sales Representative.

3 Installing Adams on Linux

- [Overview](#)
- [Required packages in Linux on the next page](#)
- [Preparing to Install the Adams Product](#)
- [Creating the Installation Directory](#)
- [Installing Adams](#)
- [Installing the Adams Controls Thin Client](#)
- [Installing the Adams Extension for Easy5](#)
- [Installing on a Heterogeneous Network](#)

Overview

This chapter provides instructions for installing the Adams software. It contains the sections:

- [Required packages in Linux below](#)
- [Preparing to Install the Adams Product on the next page](#)
- [Creating the Installation Directory on page 37](#)
- [Installing Adams on page 38](#)
- [Installing the Adams Controls Thin Client on page 49](#)
- [Installing the Adams Extension for Easy5 on page 50](#)
- [Installing on a Heterogeneous Network on page 52](#)

After installing the Adams products, you need to set up the licenses to run them. See [on page 53](#) for more information.

Note:	For general steps (roadmaps) for the various Linux configurations, see on page 111
--------------	--

Required packages in Linux

The following table provides details of the packages required in Linux to run Adams Installer and Adams applications

Table 3-1 Required packages for installation and usage of Adams in Linux

OS	Redhat 8.8	Ubuntu 22.04	SUSE 15SP4	Ubuntu 20.04	Redhat 9.2
Adams Installer	tclsh	tclsh	tclsh	tclsh	tclsh
Adams Solver with UI	mesa-libGLU	libglu1-mesa	libGLU1	libglu1-mesa	mesa-libGLU
	xterm	xterm	xterm	xterm	xterm

Note:	When running Adams Solver without the UI or from the command line, libgl/mesa and xterm packages are not required.
--------------	--

Preparing to Install the Adams Product

The primary way to receive the Adams product is by downloading the software from the Software Download Center (SDC). In the case of Linux products, this will be an executable installer for each platform. The download file will have a *.bin* extension.

Select the platform file from the SDC. Download the file to a temporary directory on a file system with enough available space.


Follow the directions in this document for installing Adams from this executable installer.

Installers always copy to the */tmp* location, if the */tmp* partition is too small, it is not possible to run the product on the machine. It is recommended to set the environmental variable '*HMI_TMP_DIR=/file_location*' which changes the default location for extracting installer files to the specified directory.

An example is shown below:

HMI_TMP_DIR=/scratch - Executing this variable will extract the files to scratch folder

Note:

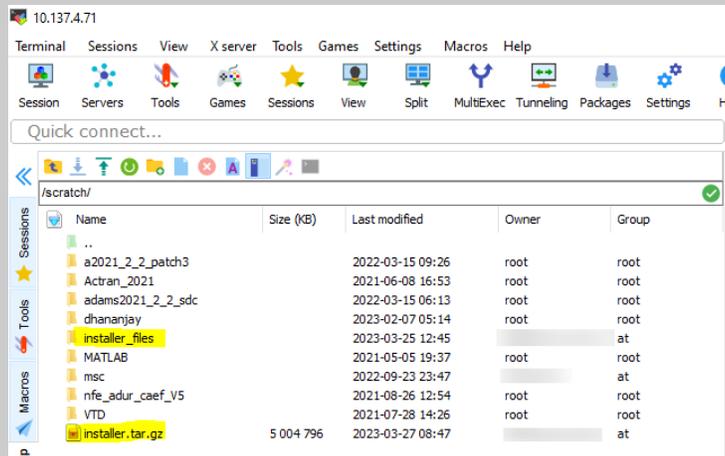

Creating the Installation Directory

This section explains how to create an installation directory in which to install the Adams products. This is the location on your file server where you want the Adams products to reside.

To create the installation directory:

1. Log on to the Linux system where you want to install the Adams products (the file server).
2. Create a directory in which to place the Adams products by entering the following command, where *install_dir* is the directory that you want to create:

```
mkdir install_dir
```

We recommend that you create a directory called */usr/adamsx* for the Adams products. In the directory name, *x* represents the current version of Adams. If you have a prior version of Adams on your system, you should install the new version in a different location. If, however, you are adding the same version of software to an existing installation, place the new software in the same location.

Installing Adams

This section contains instructions for starting the Adams installation program.

After downloading Adams from the Software Download Center (SDC), you will run the installation program from the directory you unloaded the executable installer into.

Note:	The C shell (CSH) is required for the installation and use of Adams on Linux systems. Using another shell, such as bash, will result in unexpected behaviour. Certain Linux distributions, like Ubuntu, do not have the CSH package included in their default installation, necessitating its inclusion before proceeding with the installation of Adams. To install CSH, employ the following or a similar command: <code>yum install csh</code>
--------------	---

The installation program has command line options available to help you tailor the installation to your site's needs.

Running the installation program without any options will launch it in graphical mode. Running in graphical mode uses the X-Windows display protocol. You must have the X-Windows DISPLAY variable set to a valid display to run in graphical mode.

Available Options:

<code>--help</code>	Display this information
<code>-i s</code>	Set this mode to run the installer in Silent installation mode. Use <code>-s</code> along with silent file name
<code>-i console</code>	Set this mode to if you want to install Adams through console mode by manually entering required input via Linux console without GUI install shield display

The installation responses are often system specific, it is not recommended to use the responses from one platform installer on other supported platforms.

The most common combinations are provided as examples below because Hexagon changes the name of the installation program to include product and release version number. The generic name "installer.bin" is used to represent the name of the installer in these examples.

The installation program will install in graphical mode by default.

1. Move to the installation directory you previously created.
2. Locate the installation program, `adams_XXXXXX_PLAT.bin`, in the download directory. The full path to the installation program will be needed to run it.

where `XXXXXX` is the release version, and `PLAT` is the platform name that corresponds to the platform you wish to install. For example:

`adams_2024_2_linux64_rhe88.bin`

Installing Adams on Linux

3. Start the installation program, the welcome agreement window will appear as shown below.

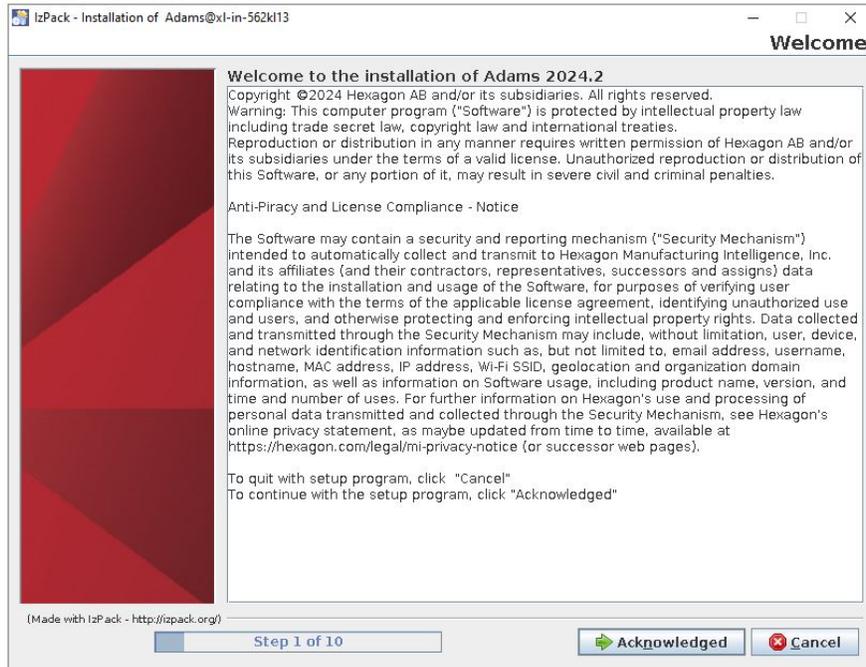


Figure 1 Welcome Agreement Window

4. Select **Acknowledged** > button to continue, or *Cancel* button to exit without installing.

Installing Adams on Linux

5. Select the full path to the directory you want to install Adams in. You can type in the directory path after selecting the *Browse* button, or use the directory tree to locate the installation directory.

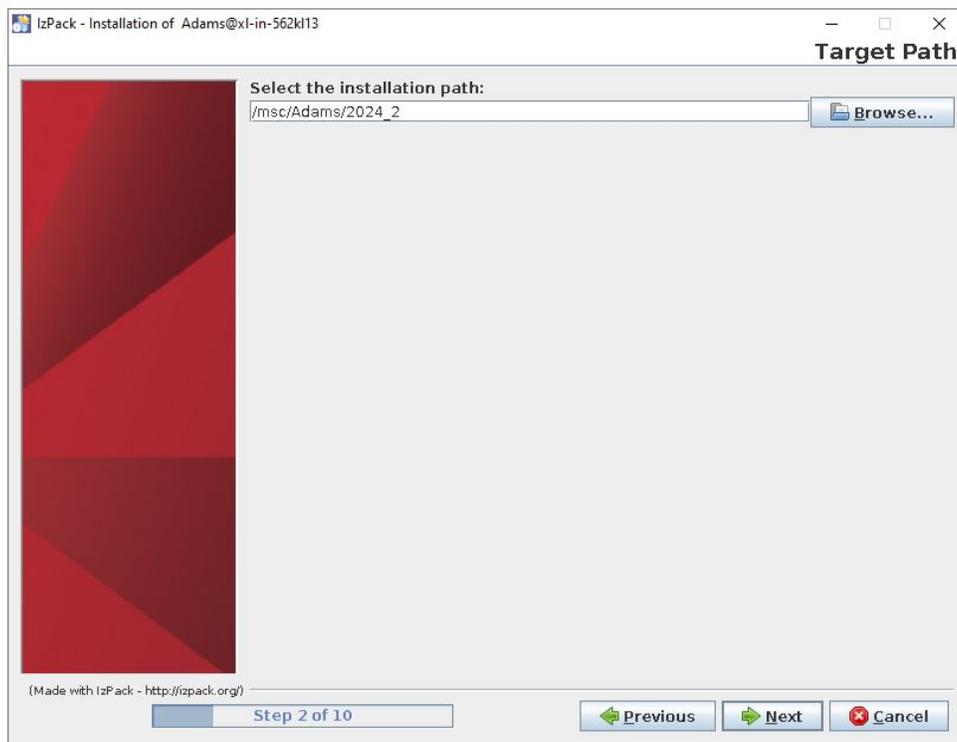


Figure 2 Selecting Installation Directory Window

Installing Adams on Linux

6. Select the packs you want to install.

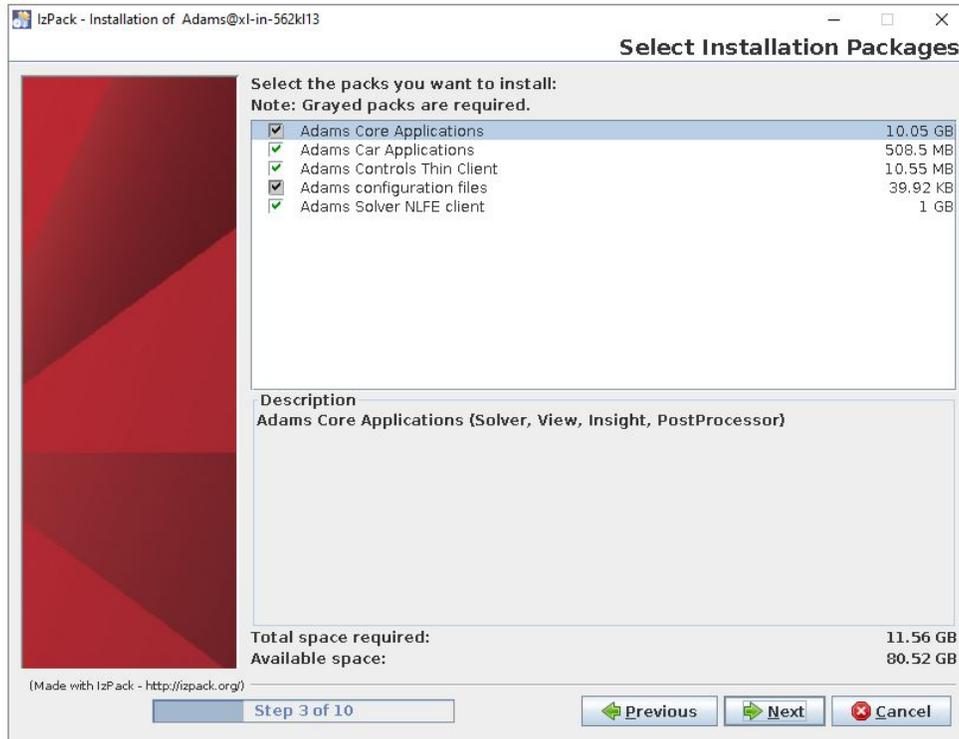


Figure 3 Selecting Installation packs

Installing Adams on Linux

7. Select the *Next >* button to confirm your installation selection (s). A progress dialog box will be displayed. You can select the *Cancel* button at any time to stop the installation.

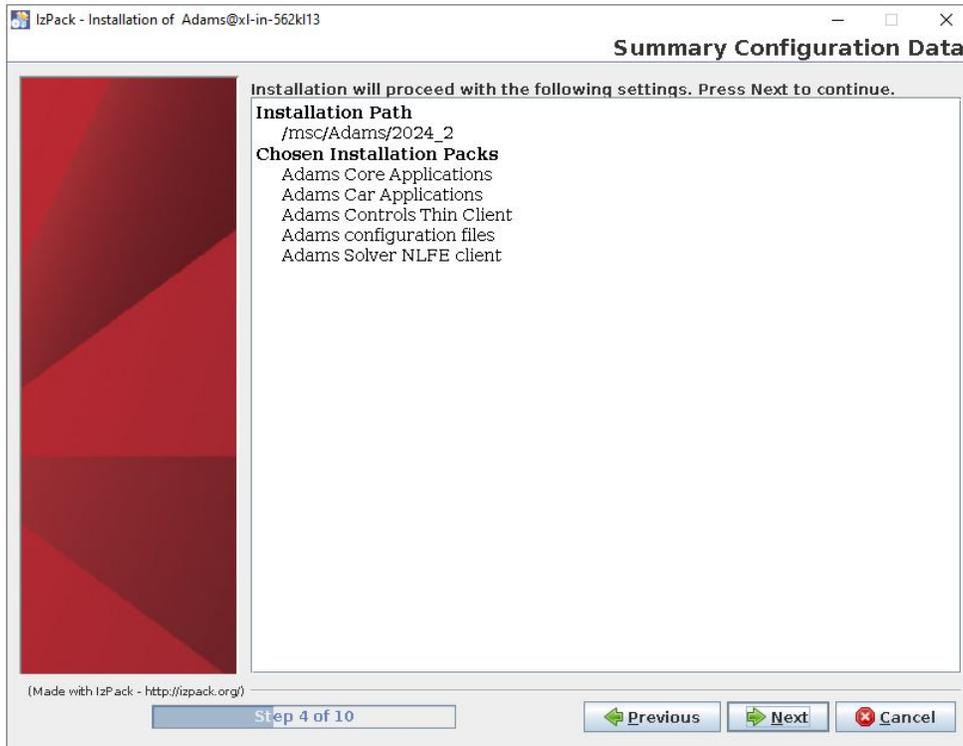


Figure 4 Installation Progress Window

Installing Adams on Linux

8. You must select your HTML Browser that will be used to access all documentation that you have installed. You can type in the full path after selecting the *Browse* button, or use the directory tree to locate the browser.

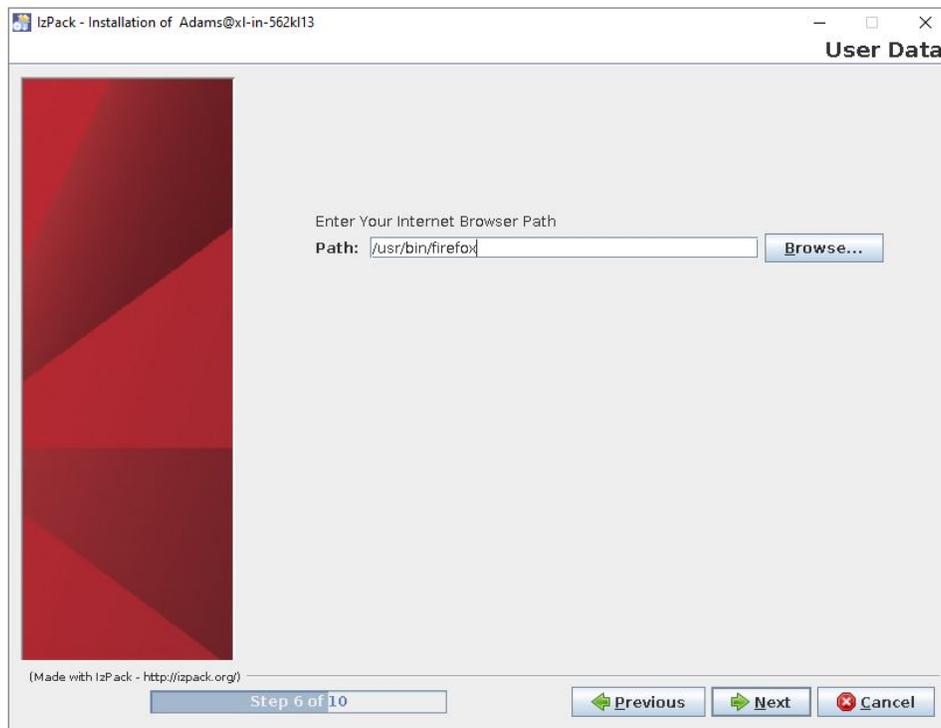


Figure 5 HTML Browser Selection Window

Installing Adams on Linux

- The Licensing dialog box allows you to choose the method of communications with an Hexagon License Manager. The most common method for communicating with the license manager is a *port@host* connection. This is the TCP port number your license manager is listening to, and the hostname of the system that is running the license manager processes. The standard Hexagon License Manager TCP port number is *27500*.

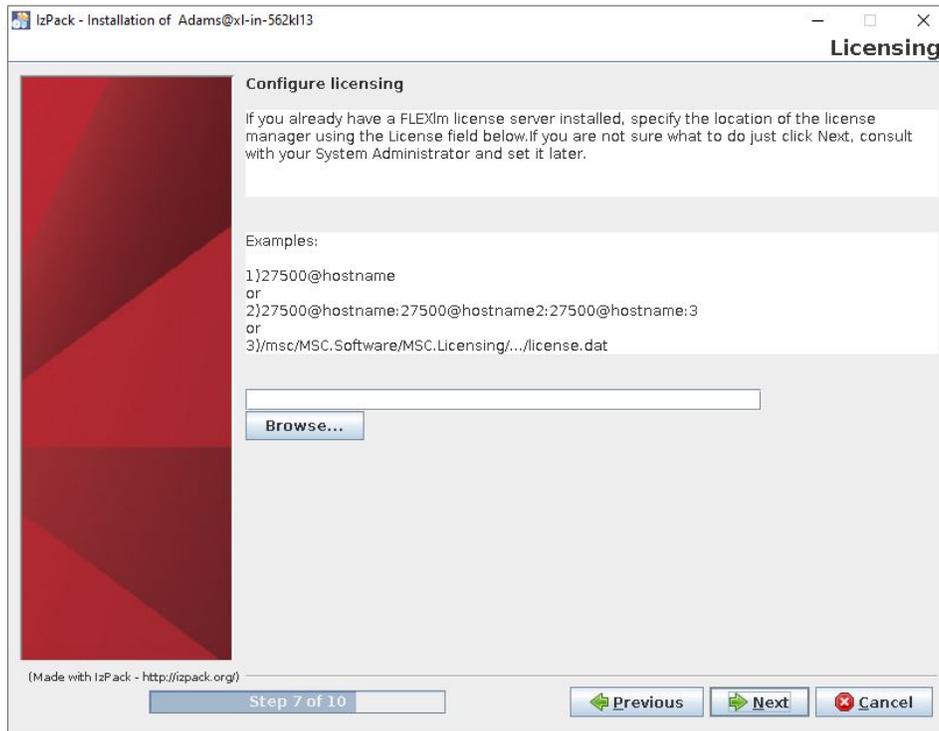


Figure 6 License Setup Window

- Select *Next* > button to continue.

Installing Adams on Linux

11. Provide your preference regarding the creation of shortcuts in the start menu

- If you enable the checkbox, you will need to *Select a Program Group for the shortcuts*. The available options are either "*Current User*" or "*All Users*".
- If you prefer not to create a shortcut, you can simply select the "*Next*" option.

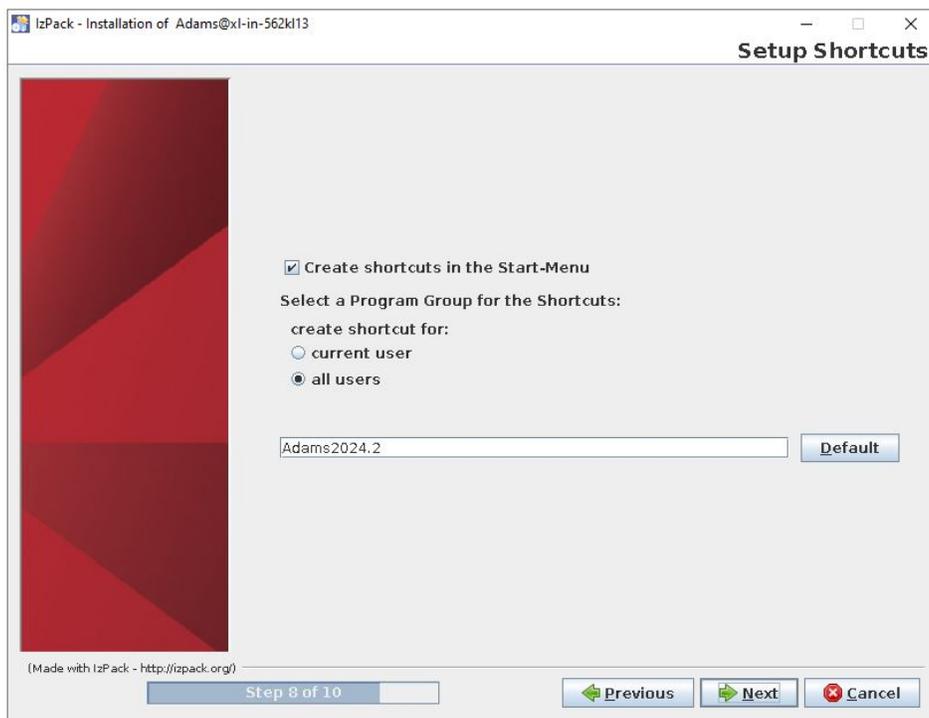


Figure 7 Setup Shortcuts window

Installing Adams on Linux

12. After the Processing a summary dialog box announces the completion of the installation process and provides final instructions for license manager communication changes should you need to change that setting in the future. It also provides the Hexagon Technical Support e-mail address. Selecting *Finish* will complete the installation process.

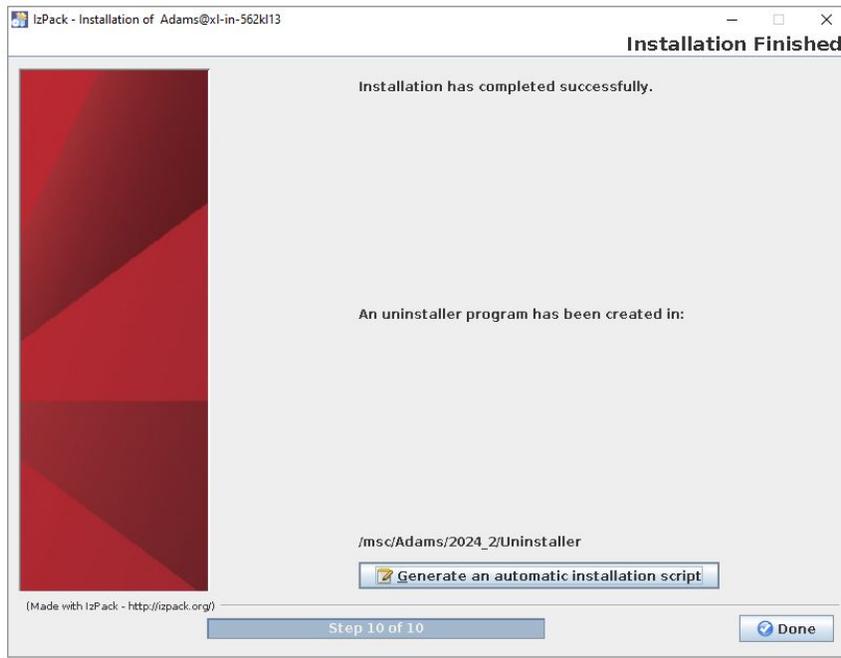


Figure 8 Installation Complete Confirmation Window

13. If you chose to install either the *Adams* package or the *Adams Advanced* package, you will need to setup the *Adams Extension for Easy5*. For more information, refer to [Installing the Adams Extension for Easy5 on page 50](#)

Installing Adams on Linux

Other than the default standard installation, you will encounter various installation scenarios. The following lists the common standard scenarios used in Adams.

Scenario 1:


Linux typically involves running the installer without any user intervention or interaction. If you want to install Adams using the silent installation option, then in command-line use “-s” along with silent file name

```
installer.bin -s auto_instal.xml
```

The silent installation process should start and run without any user intervention.

Note:

The file *auto_instal.xml* can be generated after you select *Generate an automatic installation Script* option at the end installation. See [Step 10](#).

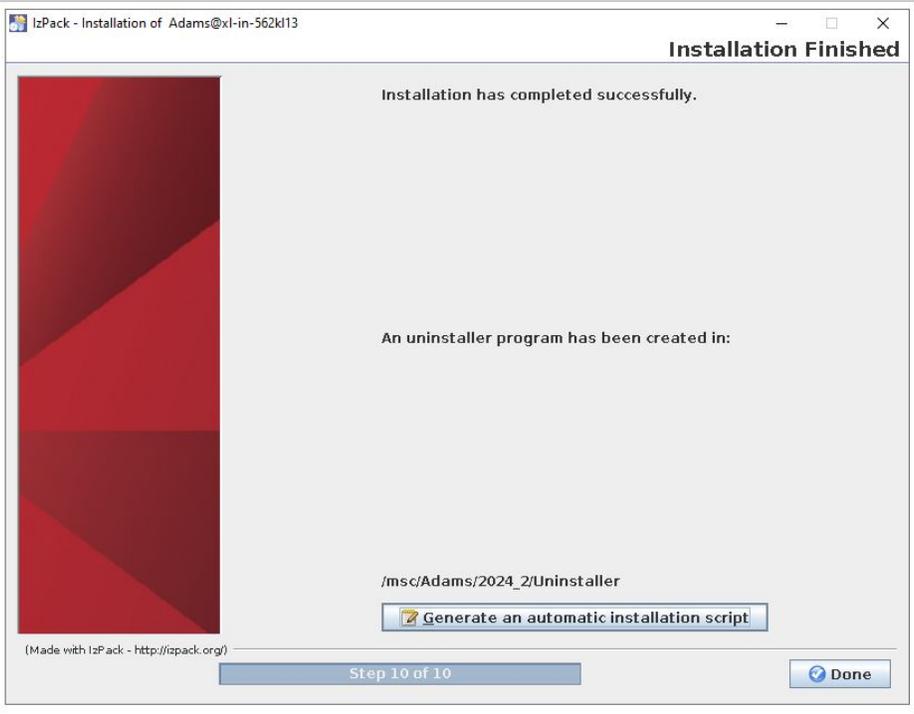

The screenshot shows a window titled "IzPack - Installation of Adams@xl-in-562kl13". The window content includes a red decorative graphic on the left, the text "Installation Finished", "Installation has completed successfully.", "An uninstaller program has been created in:", and the path "/msc/Adams/2024_2/Uninstaller". A button labeled "Generate an automatic installation script" is visible. At the bottom, it says "(Made with IzPack - http://izpack.org)", "Step 10 of 10", and a "Done" button.

Installing Adams on Linux

Scenario 2:

You have tried to install, but the installer reports that it does not have enough file system space to create temporary files during the installation. If you are facing space issue in /tmp directory, you can change extraction location for installer files using environment variable.

Set HMI_TMP_DIR to directory of your choice.

Example: `export HMI_TMP_DIR=/root/testing`

Scenario 3:

You are installing on a system that does not have a system console running an X-Windows server. If you want install Adams through console mode by manually entering required input via Linux console without GUI install shield display.

`installer.bin -i console`

The `-i console` mode will use text prompts to answer the questions required to install. You can use `-i console` mode with all other options.

Installing the Adams Controls Thin Client

The Adams Controls Thin Client is a subset of Adams Controls. This client can be helpful to Easy5 or MATLAB users who want to use TCP/IP communication when performing co-simulations with Adams Controls, but don't want a full Adams installation.

To install the Adams Controls Thin Client:

1. Follow Step [1](#) on page [38](#) to Step [5](#) on page [40](#).
2. Select only *Controls Client Applications* and *Next*
3. Select *Install* from the Product Selection Summary dialog box.
4. Select *Finish* from the last dialog box to complete the installation

Note:

You must install the Adams Extension for Easy5 to use the Adams Controls Thin Client with Easy5. For more information, see [Installing the Adams Extension for Easy5 on the next page](#).

Installing the Adams Extension for Easy5

Note:	This procedure is only necessary if you installed Adams Controls.
--------------	---

To run Adams and Easy5 together, you must install the Adams extension into Easy5. To import models into Adams that were exported from Easy5 (containing components from licensed Easy5 libraries), you must also configure your computer so that Adams knows how to find your Easy5 license. The following procedures explain how to do this.

To install the Adams extension for Easy5:

1. Make sure that both Easy5 and Adams have been installed.
2. Make sure you have permission (that is, root ('superuser') privilege) to add and modify files in the Easy5 installation directory.
3. Identify the command line command used to start the Adams version you will use with Easy5, for example, *adams2024_2*.

Note:	If you are unable to identify a command line command to run Adams but you can identify the top-level directory of the Adams installation, you can use <i>-d directory_path</i> in place of the command line command in the following steps.
--------------	---

4. Perform the following:
 - a. Open an xterm window and set your working directory to a directory outside the Easy5 installation directory tree.
 - b. Start Easy5. The standard command is *easy5x*.
 - c. In the Easy5 main window, from the *File* menu, select *Open Command Shell*.
 - d. At the prompt in the command shell, enter:

```
$EZHOME/install_adams_controls.ksh adams_command
```

where *adams_command* is the command line command from Step 3 above.
 5. Type *exit* to close the command window.
 6. If you started Easy5, from the *File* menu, select *Quit*.
- The Adams extension installation is complete. Be sure to configure your computer as described next.

To configure your computer to run licensed exported Easy5 models within Adams:

1. Start Easy5.
2. From the *File* menu, select *Open Command Shell*.
3. At the prompt in the command shell, type *easy5x --license*.

Easy5 displays the licensing information, beginning with the type of license and the server name (if a server license) or the path to the license file.

Installing Adams on Linux

4. Write down the contents of the line that starts with *Active license file(s)*, and the value that appears in the line following it (for example, *27500@rainier*).
5. Perform one of the following:
 - If the line is *Active license file(s) [EASY5_LMD_LICENSE_FILE]*, set the environment variable *EASY5_LMD_LICENSE_FILE* to the output value displayed in Step 4 above (for example, *27500@rainier*).
 - If the line is *Active license file(s) [MSC_LICENSE_FILE]*, find the value of the environment variable *MSC_LICENSE_FILE* to see what license file Adams is using.
 - If Easy5 and Adams are using different licenses (or license servers), set *LM_LICENSE_FILE* to the value for the Easy5 license (for example *2500@bosco*).
 - If Easy5 and Adams are using the same license, your computer is configured properly.

Installing on a Heterogeneous Network

If you are installing the Adams products for use on different Linux platforms (Sun, HP, and so on) you are performing a heterogeneous installation. Adams installation directory can support multiple platforms. Binary files specific to each supported platform are located in architecture directories under each product directory. You can use a single installation directory to install all supported Adams platform binaries or multiple file servers to spread out the file serving load to multiple systems.

To install Adams on a heterogeneous network:

- Follow the instructions in [Installing Adams on page 38](#), for each platform on which you are installing Adams products.

4

Licensing on Linux

- [Overview](#)
- [About the Adams License Server](#)
- [Licensing Adams When File and License Server Are Same Machine](#)
- [Licensing Adams When File and License Server Are Different Systems](#)
- [Starting the Adams License Server](#)
- [Restarting the Adams License Daemons](#)
- [Changing the License to Point to a Different License Server](#)
- [Verifying a Successful License](#)

Overview

This chapter provides instructions for licensing the Adams software. You must complete the steps in [on page 34](#) before licensing the Adams software. Refer to [on page 111](#) for which procedure in this chapter to follow depending on your system configuration.

The chapter contains the sections:

- [About the Adams License Server on the next page](#)
- [Licensing Adams When File and License Server Are Same Machine on page 56](#)
- [Licensing Adams When File and License Server Are Different Systems on page 57](#)
- [Starting the Adams License Server on page 58](#)
- [Restarting the Adams License Daemons on page 59](#)
- [Changing the License to Point to a Different License Server on page 60](#)
- [Verifying a Successful License on page 61](#)

About the Adams License Server

Adams licensing requires that you operate at least one license server. You can optionally request to use three Adams license servers (see [About a Three-Server Configuration](#) below). The Adams license servers can be on any of the supported Adams platforms connected to the network that runs the Adams products. Adams uses the FLEXlm[®], license system from Flexera Software.

The following sections give you tips for selecting the license server and explain different configurations:

- [Tips for Selecting a License Server below](#)
- [About a Three-Server Configuration below](#)

Tips for Selecting a License Server

You should select the machine to use as your Adams license server using the following guidelines. The machine should:

- Have a local file system that can hold the Adams license server software. If you use a remotely mounted file system for your Adams license server, you risk having your users unable to run the Adams products if the server goes down. You should never run the Adams license server from a diskless node on the network.
- Have enough system resources to robustly serve the number of Adams users requesting a license.
- Be on the same local area network (or sub-net) if the number of Adams license requests is in the range of hundreds per day.
- Be reliable. This means that it has reliable power and its hardware subsystems are in good working order.

You should consolidate your licenses because redundant license servers add complexity. Evaluate what you really want to achieve by using redundant license servers. More robust hardware systems, instead of redundant license servers, can better ensure less down time. You should look at ways to consolidate the number of license servers at the departmental, division, or even at the company-wide level.

About a Three-Server Configuration

For each of the license types, you can have three machines on your network that are designated as license servers. Selecting three license servers lets you back up the main license server in case one of the other machines is down. If your password certificate lists three machines under the *Server Host Name* column, you purchased the three-server configuration. You must install your passwords on *each* of the servers as explained in [Licensing Adams When File and License Server Are Same Machine on the next page](#).

You should log in to one of the servers and open three shell windows. Log in to the other two servers in the different shell windows and repeat the procedures in this chapter for each server. You also need to start each of the license servers as explained in [Starting the Adams License Server on page 58](#). The order of startup is not critical. The first machine, however, to start the license daemons becomes the master server and serves licenses until it is unavailable.

Licensing Adams When File and License Server Are Same Machine

Follow the instructions below if your license server and file server are the *same* machine. You should log in to the system that appears in the *Server Host Name* column on the password certificate.

To set up licensing:

1. From the Installation directory start the installation program *INSTALL.ADAMS*.
2. Enter *1* to select the option, *Install Adams passwords on this license server*.
3. Enter *y* if the name of the Adams license server that appears in the prompt is the same as the machine designated as the server in your e-mail password certificate. (Depending on the type of license you have, the server name may not be listed in your e-mail certificate; in this case, use the *hostid* instead.)
4. The default is the machine to which you are logged on. If this is not your license server, enter *n*, log in to your license server, and start the procedure again.
5. Follow the instructions in the e-mail password certificate to locate the information required for licensing your Adams software.
6. At the prompt *Are your passwords in a file e-mailed from MSC Software?*, enter *y*.
7. Enter the name of the text file that contains your passwords.
The installation program reads this file and constructs a properly formatted license data file (*license.dat*) for you.
8. If the installation program cannot read the file, open the original file and verify that you cut the information required for licensing at the correct locations.
9. Continue with [Starting the Adams License Server on page 58](#).

Licensing Adams When File and License Server Are Different Systems

Follow the instructions below if your license server and file server are different systems or if you purchased a three-server configuration. You should log into a system that appears in the SERVER HOST NAME column on your password certificate.

If you are installing passwords for a three-server configuration, you should log into one of the servers and open three shell windows, one for each server. Use two of these windows to remotely log into the other license servers and repeat the instructions in this section for each server.

If *you are not familiar* with the FLEXlm license system you should install the license manager from the Installation Program and use the automation described below.

1. Start the Installation Program as described on [38](#) of this manual
2. Enter the Installation directory
3. Select the *User Selectable* installation type
4. Select *Install* after confirming your package selection, and *Finish* at the last dialog box.
5. Move to the installation directory you specified in Step [2.](#) above
6. Run the `INSTALL.ADAMS` installation script
 - a. Enter `1`, to enter passwords supplied by e-mail
 - b. Enter `2`, to start the license manager on the system you are logged into
 - c. Enter `7`, to exit

You should continue with [Restarting the Adams License Daemons on page 59](#)

For more information, see Hexagon Licensing document.

Starting the Adams License Server

Follow the instructions below for all of the license types, as well as the three-server configuration. For three-server configurations, you must repeat this procedure on *each* license server. You must enter the commands on each license server within one minute.

To restart the Adams license server:

1. Start the installation program *INSTALL.ADAMS*.
2. At the prompt, enter *2* to select the option, *Start the Adams license server on this system*. The Adams license daemons are automatically started.

Continue with the next section to allow the license daemons to automatically restart when you reboot your system.

Restarting the Adams License Daemons

You must modify the reboot procedure on your license servers to include a restart of the Adams license daemons during a system reboot.

To restart the Adams license daemons:

1. Change to the directory */msc/Adams*, where *msc* is the directory where the Adams products are installed.
2. Locate the file *reboot.txt* based on your platform.

Note:

To add the Adams license server startup commands, follow the instructions provided by your operating system.

The licensing of Adams products is complete. You can now verify that installation was successful by following the procedures in [Verifying a Successful License on page 61](#).

Changing the License to Point to a Different License Server

1. Start the installation program with the *client* argument (for example, *install.adams client*) or select option 4.
2. Enter the port number that is used by the license server.
3. Enter the name of the Adams license server that has the licenses you want to use. This can be a different machine than the machine on which you installed the Adams products, which is the file server.

Verifying a Successful License

Follow the procedure below to verify that the Adams installation was successful.

1. Start the installation program on the license server *INSTALL.ADAMS*.
2. At the prompt, enter *5* to select the option, *Generate a problem report*. This automatically generates a report called *PROBLEM.RPT* that you can use to verify the Adams installation.
3. Using a text editor, open the *PROBLEM.RPT* file and review the information. Verify that each of the features installed are able to retrieve a license.

5 Installing Adams on Windows

- [Overview](#)
- [Installing Adams on the next page](#)
- [Installing the Adams Controls Thin Client](#)
- [Installing the Adams Extension for Easy5](#)
- [Installing Adams in Silent Mode \(Batch\)](#)

Overview

The following sections explain how to install Adams 2024.2 products and online documentation by running the Adams 2024.2 installation program. It also includes information on licensing your Adams 2024.2.

- [Installing Adams below](#)
- [Installing the Adams Controls Thin Client on page 74](#)
- [Installing Adams in Silent Mode \(Batch\) on page 78](#)

Installing Adams

This section shows you how to install Adams software and documentation.

To install Adams:

1. Open Windows Explorer, browse to your Adams download and double click the Adams 2024.2 self extracting executable file.

The language selection window will appear as shown below:

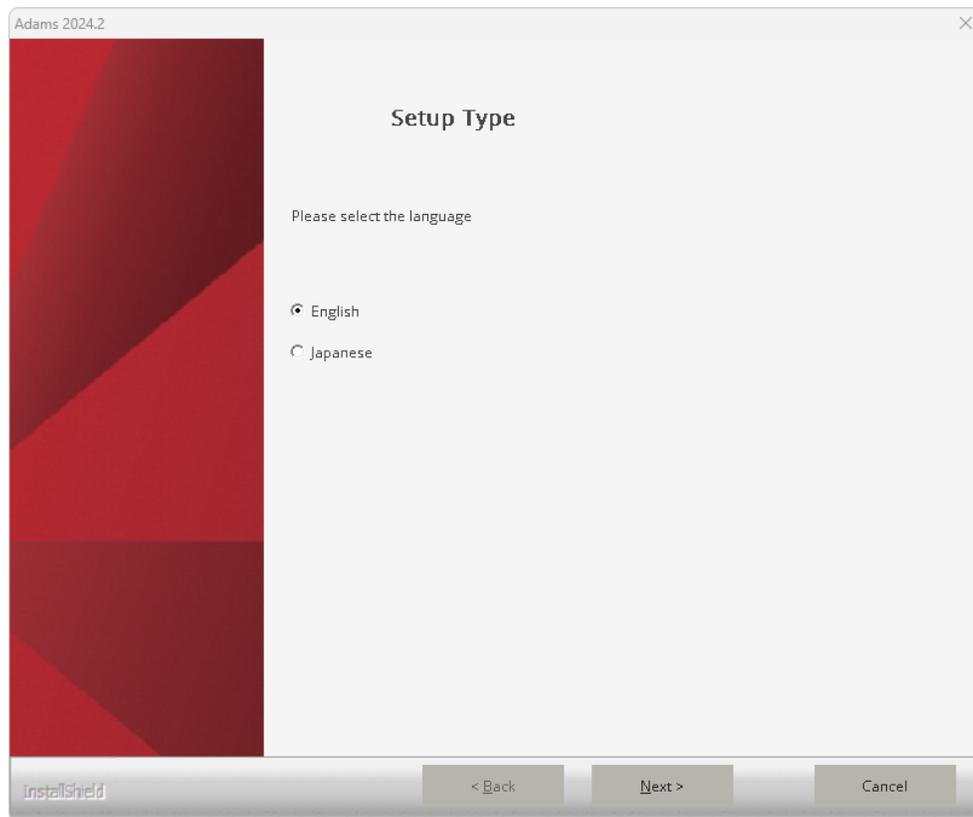


Figure 1 Setup Type Window

Installing Adams on Windows

2. If you select **“English”** the welcome agreement window will appear as shown below.

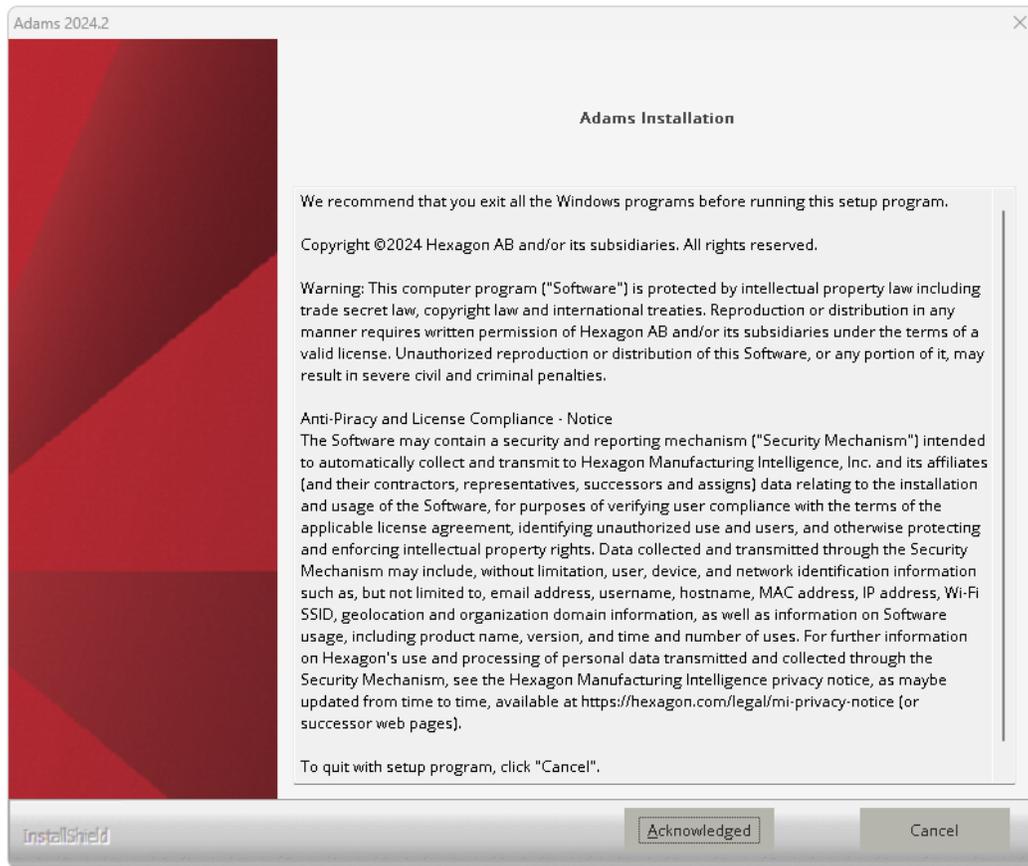


Figure 2 License Agreement Window - English

Installing Adams on Windows

- If you select “**Japanese**” the welcome agreement window will appear as shown below.



Figure 3 License Agreement Window - Japanese

- Select **Acknowledged** button to continue, or *Cancel* button to exit without installing.

Note:

To re-select the language, click **Cancel** button to exit and restart the installation.

Installing Adams on Windows

The Customer Information window appears as shown below.

Adams 2024.2

Customer Information

Please enter your information.

User Name:
abc

Company Name:
abc

Install this application for:

Anyone who uses this computer (all users)

Only for me

InstallShield

< Back Next > Cancel

Figure 4 Customer Information Window

5. In the Customer Information window, enter your user and company name, and then select one of the following:
 - *Anyone who uses this computer (all users)* - Anyone logged on to this machine can run Adams 2024.2
 - *Only for me* - A user must be logged on using the user name and password that was used at the time of installation.

Installing Adams on Windows

6. Select *Next*.

The Setup Type window appears as shown below. Browse to the desired installation folder location.

Note: Installation paths on drives other than the C:\ and including spaces are unsupported. The installation will proceed, but Adams will fail to launch. If Destination Folder is on a drive other than C:\ do not select a path with a space in it.

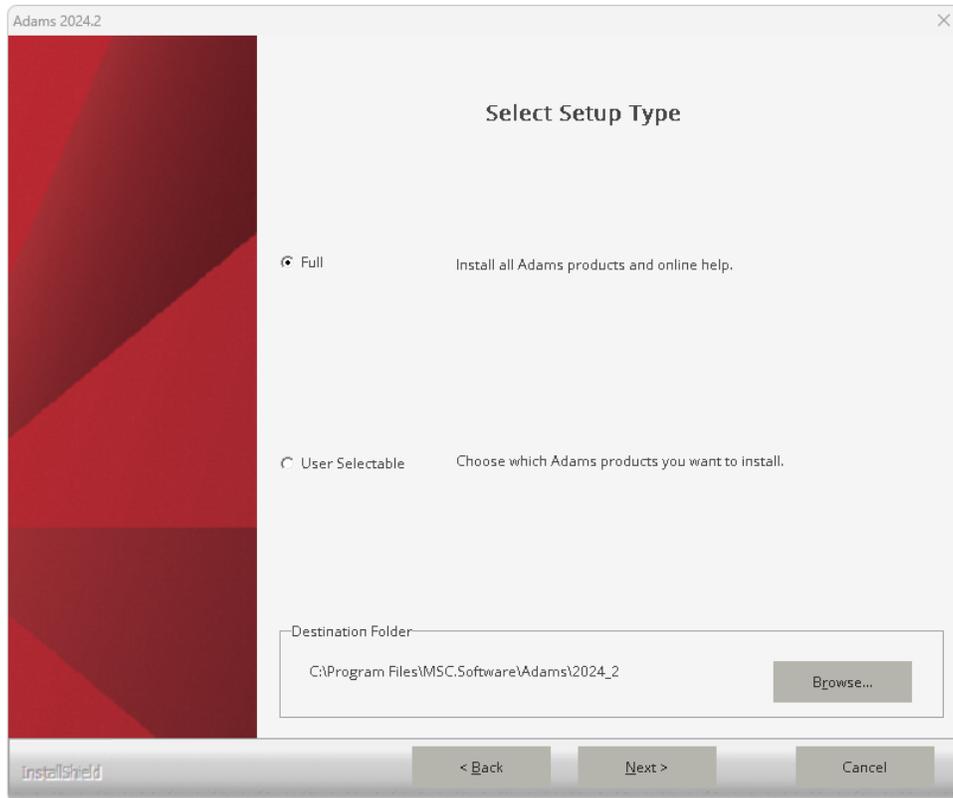


Figure 5 Setup Type Window

Installing Adams on Windows

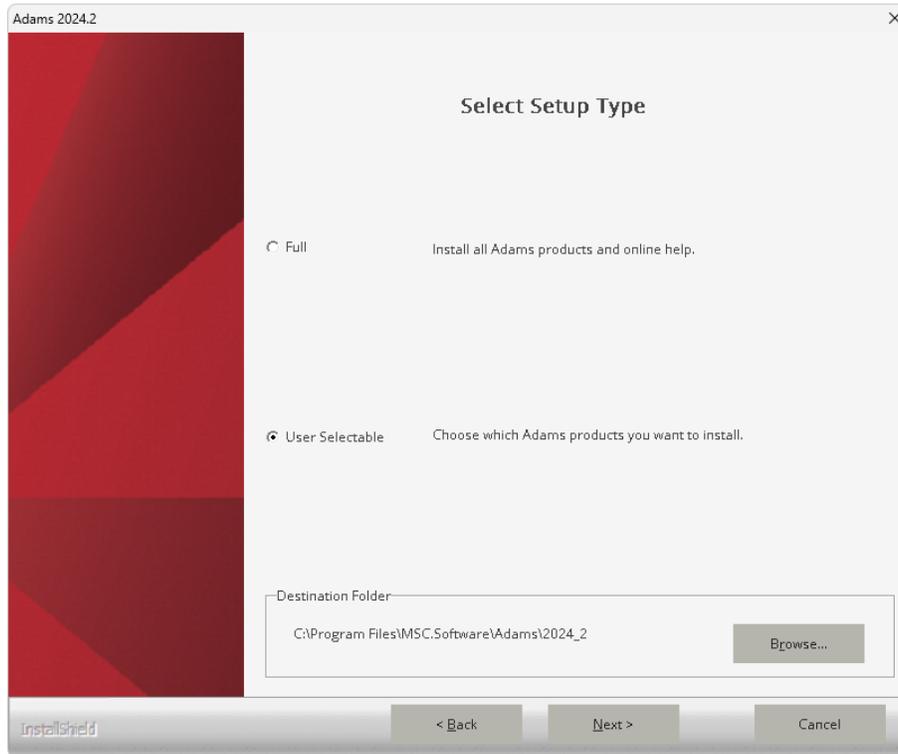


Figure 6 User Selectable

7. Select the type of installation you want to perform:
 - *Full* - Installs all Adams 2024.2 products and documentation. Always use this option if you want to use this machine as a file server, allowing other machines to client to it.
 - *User Selectable* - Allows you to select the specific Adams 2024.2 packages and documentation you want to install.
8. If you would prefer Adams 2024.2 to be installed in a folder other than the default destination folder, select *Browse*, and then select the desired folder.

The default directory for installing Adams 2024.2 products is
C:\Program Files\MSC.Software\Adams\2024_2.

Installing Adams on Windows

9. Select Next.

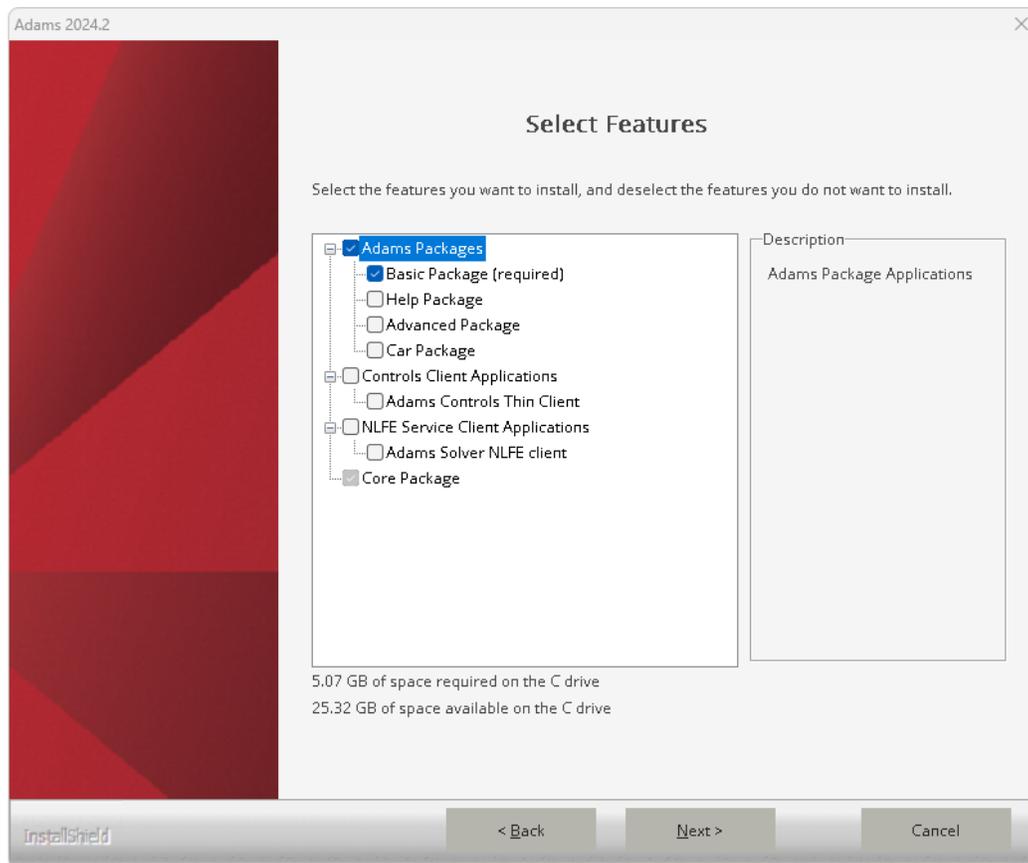


Figure 7 Installation Settings Confirmation Window

10. Depending on your selection in [Select the type of installation you want to perform: on the previous page](#), do one of the following:

- *Full* - Continue to [Confirm the installation settings and then select Next to begin the installation below](#)
- *User Selectable* - In the Select Components window, select the components you want to install. Then, select *Next*.

Note:

You cannot install the Adams Controls Thin Client at the same time as other Adams 2024.2 products. You must install it by itself. See [Installing the Adams Controls Thin Client on page 74](#) for more information

11. Confirm the installation settings and then select *Next* to begin the installation.

Installing Adams on Windows

12. The License Setup window appears as shown below.

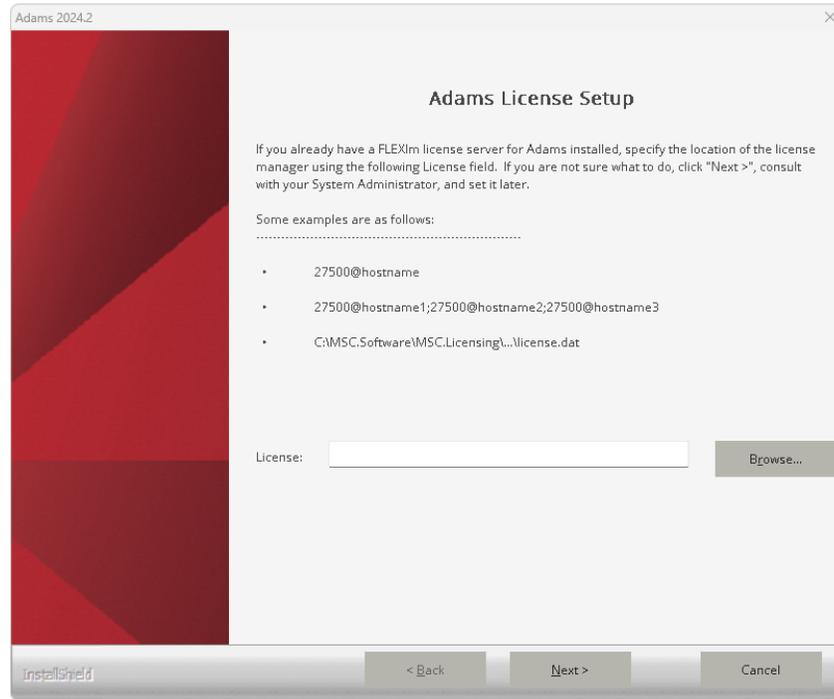


Figure 8 License Setup Window

13. Enter the name of the license server or the path to your license file. If you don't enter this information here, you can specify your license using the procedure in [Specifying your License on page 83](#).

14. Select *Next*.

Installing Adams on Windows

15. Specify whether or not you want to install the various desktop icons. If you select Yes, then select the products for which the icons to be created.

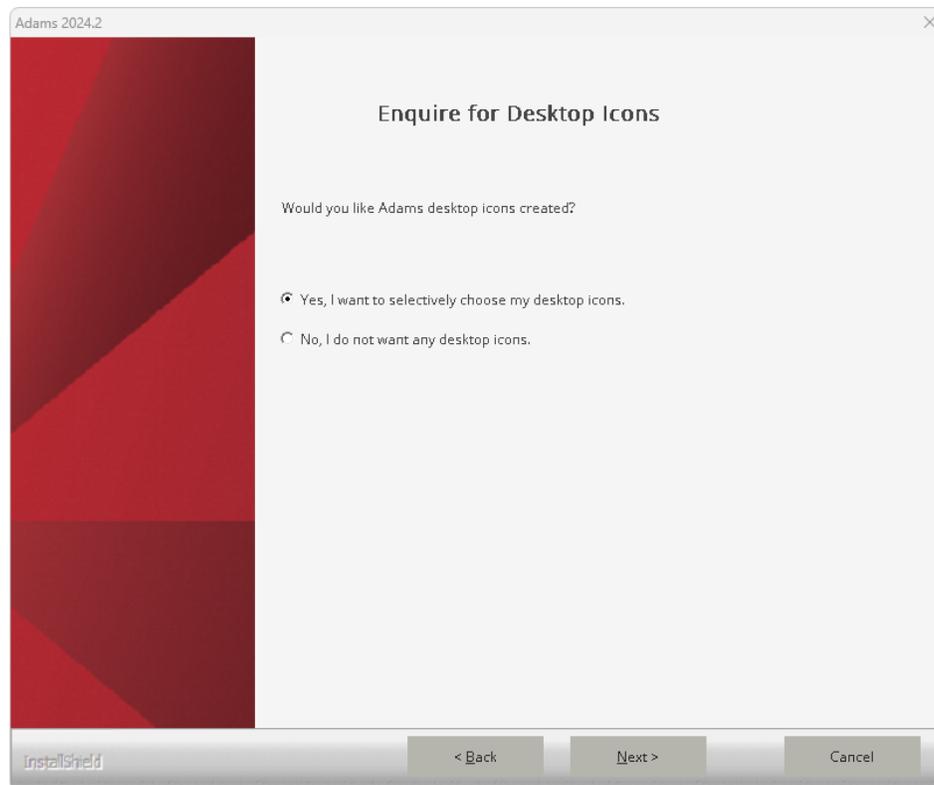


Figure 9 Adams 2024.2 Desktop Icons Window

16. Select *Next*.

Installing Adams on Windows

The Solver File Association window appears as shown below.

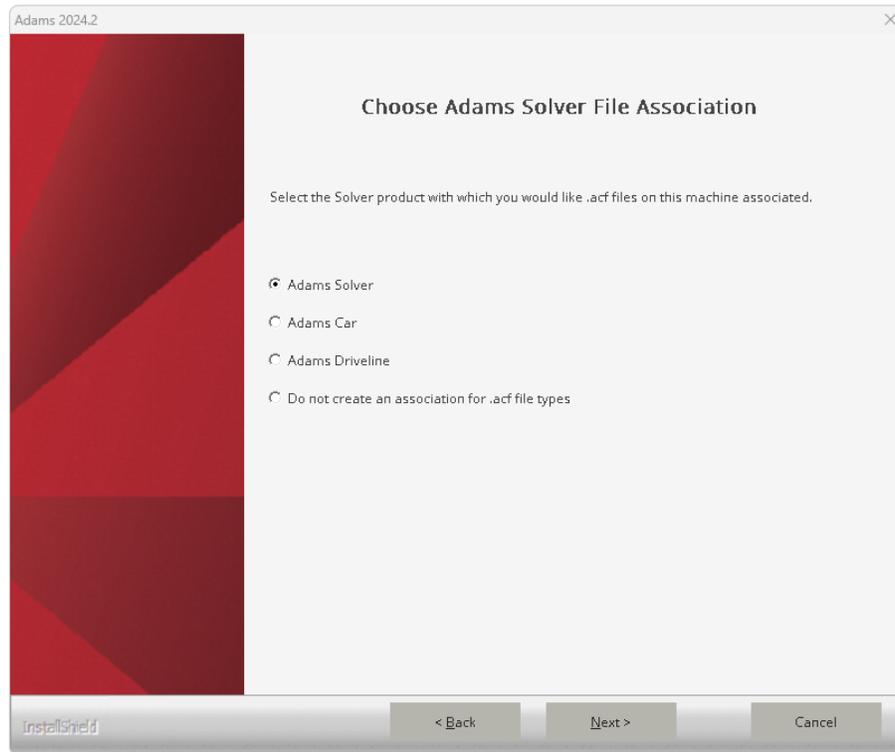


Figure 10 Solver File Association Window

17. Select the solver product with which you want .acf files on this machine associated. You can also select not to associate .acf files with an Adams 2024.2 product.

18. Select *Next*.

A dialog box appears indicating that the file permissions are being changed. If you do not have sufficient administration privileges you need to contact the system administrator.

19. Select *Next*.

If you do not have the Visual Studio Redistributable Package installed, the installer begins the installation of the following packages:

- Microsoft VC++ 2017 x64 redistrib - 14.12.25810
- Microsoft VC++ 2019 x64 redistrib - 14.24.28127
- Microsoft VC++ 2022 x64 redistrib - 14.32.31326.0

Installing Adams on Windows

20. To view the readme file, select *I would like to view the README file.*

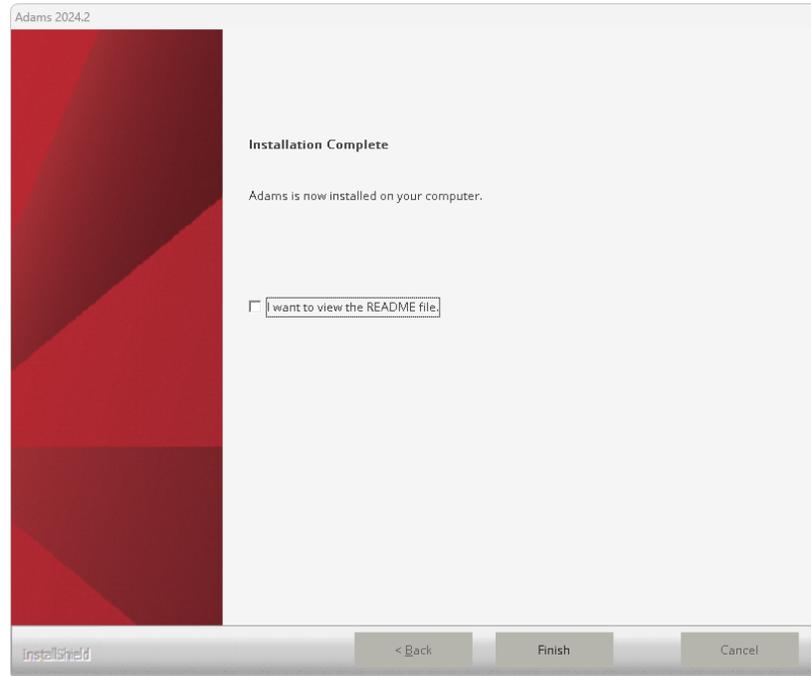


Figure 11 Installation Complete Confirmation Window

21. Select *Finish*.

22. If you installed Adams Controls, you need to install the Adams 2024.2 Extension for Easy5. Previously, this was done automatically by the Adams Controls install program. For more information, refer to [Installing the Adams Extension for Easy5 on page 50](#).

23. If you want to use this installation as a file server (so that other machines can install from it), share the installation directory.

Installing the Adams Controls Thin Client

The Adams Controls Thin Client is a subset of the full Adams installation. This client can be helpful to Easy5 or MATLAB users who want to:

1. Use TCP/IP communication when performing co-simulations with Adams Controls.
2. Generate an External System Library for Control System Import.

To install the Adams Controls Thin Client:

1. Follow steps [Step 1](#) on page [63](#) through [Step 6](#) on page [67](#).
2. In the Select Setup Type window, select *User Selectable*.
3. Select *Adams Controls Thin Client*, making sure no other products are selected.
4. Continue with [Step 11](#) on page [69](#) and complete the remaining steps in the installation procedure.

Note:

You must install the Adams Extension for Easy5 to use the Adams Controls Thin Client.

Installing the Adams Extension for Easy5

Note: This procedure is only necessary if you installed Adams Controls.

To run Adams and Easy5 together, you must install the Adams extension into Easy5. To import models into Adams that were exported from Easy5 (containing components from licensed Easy5 libraries), you must also configure your computer so that Adams knows how to find your Easy5 license. The following procedures explain how to do this.

To install the Adams extension for Easy5:

Note: Check <https://help.hexagonmi.com/> to find the versions of Easy5 that are compatible with Adams. Select the current version, for example *Adams 2024.2 - Online Help (HTML)* and go to *Release Guide -> Supported Versions of Integration Products*.

Installation of the Adams Controls Extension is performed automatically during the Easy5 installation process if Adams is previously installed, and you answer "Yes" to the installer prompt asking you to install this component.

To manually install the Adams Controls Extension:

1. Make sure that both Easy5 and Adams have been installed.
2. Make sure you have permission to add and modify files in the Easy5 installation directory. You need administrator privileges if the installation directory is located in "C:\Program Files".
3. Perform the following (As an administrator if Easy5 is installed in "C:\Program Files"):
 - a. From the *Start* menu, point to *Programs*, point to *Easy5 <version>* and then left-click on *Easy5* to launch Easy5.

Note: To run Easy5 as Administrator, right-click on Easy5 and in the menu that pops up, under "More", select "Run as administrator". This will launch Easy5 as Administrator.

- a. From *File* menu in Easy5, Click on "Open Command Shell".
 - b. At the prompt within the Easy5 command shell type:
install_adams_controls.bat <Adams_topdir> %EZHOME%
where: ***<Adams_topdir>*** is the top-level directory for Adams, also provided by "*adams2024_2-top*"; ***EZHOME*** is an environment variable available in Easy5 Command Shell and it points to the top-level directory of Easy5 (for example, C:\Program Files\MSC.Software\Adams\2024_2 C:\Program Files\MSC.Software\Easy5\2021.2, respectively).
4. Type *exit* to close the command window.
5. If you started Easy5, from the *File* menu, select *Quit*.

Installing Adams on Windows

The Adams extension installation is complete. Be sure to configure your computer as described next.

To configure your computer to run licensed exported Easy5 models within Adams:

1. Start Easy5.
2. From the *File* menu, select *Open Command Shell*.
3. At the prompt in the command shell, type *easy5x -license*.
Easy5 displays the licensing information, beginning with the type of license and the server name (if a server license) or the path to the license file.
4. Write down the contents of the line that starts with *Active license file(s)*, and the value that appears in the line following it (for example, *27500@rainier*).
5. Perform one of the following:
 - If the line is *Active license file(s) [Easy5_LMD_LICENSE_FILE]*, set the environment variable *Easy5_LMD_LICENSE_FILE* to the output value displayed in Step 4 above (for example, *27500@rainier*).
 - If the line is *Active license file(s) [MSC_LICENSE_FILE]*, find the value of the environment variable *MSC_LICENSE_FILE* to see what license file Adams is using.
 - If Easy5 and Adams are using different licenses (or license servers), set *LM_LICENSE_FILE* to the value for the Easy5 license (for example *2500@bosco*).
 - If Easy5 and Adams are using the same license, your computer is configured properly.
6. For Windows platforms and when using Easy5 2013 or older, modify the Path environment variable to include the path to the lib_em64t_IF91 subdirectory (64 bit Easy5) or lib_nt_IF91 subdirectory (32 bit Easy5) of your Easy5 installation tree.
 - If your Easy5 (2013 or older) model contains components from a licensed library (for example, the Thermal-Hydraulic or Gas Dynamics libraries), you will need to make sure Adams finds your Easy5 license. Failure to perform this step will result in the Easy5 license library not being found.
 - The Easy5 model import feature in Adams (Adams importing an Easy5 library) is not supported with the GNU compiler. If GNU compiler is required, an FMI based interface is recommended (Adams importing an Easy5 FMU).

To find the appropriate value for the variable:

- a. Start Easy5.
- b. Open an Easy5 command shell: from the Easy5 File menu, select Open Command Shell.
- c. At the command shell prompt, enter: `echo %EZHOME%`.

The output is the directory in which Easy5 is installed. You will use the directory information in Step 5 below. The usual value of EZHOME is:

`C:\Program Files\MSC.Software\Easy5\<version>\`

Note:

Check <https://help.hexagonmi.com/> to find the versions of Easy5 that are compatible with Adams. Select the current version, for example *Adams 2024.2 - Online Help (HTML)* and go to *Release Guide -> Supported Versions of Integration Products*.

To apply the value of the environment variable:

- a. From the **Start** menu, point to **Settings**, and then select **Control Panel**.
- b. In the Control Panel dialog box, select the System icon.
- c. In the System Properties dialog box, select the Advanced tab.
- d. In the Advanced tab container, select Environment Variables.

Adams must know the path to the subdirectory of your Easy5 installation tree to be able to load ez5_lmgr.dll:

lib_nt_IF91 - For the Intel FORTRAN 10.1 compiler.

- e. Using the path from step 3, in the Environment Variables dialog box, append or create the path to the user variable as follows:

Variable Name = PATH

For the Intel FORTRAN 10.1 compiler, enter the following, where <CURRENT_VALUE> is the current value of PATH:

Variable Value = <CURRENT_VALUE>; %EZHOMEx%\easy5x\lib_nt_IF91

and where the value of EZHOME is taken into account.

Installing Adams in Silent Mode (Batch)

By creating a batch setup file, you can automate the process of performing identical installs. You can customize this file with your preferred settings, put it on a server, and let other users perform their own installation using the same settings. This section shows you how to create and run the batch file.

To create the batch setup file:

1. From the *Start* menu, select *Run*.
2. In the Run dialog box, enter the following:

```
C:\templadams2024_2_windows64.exe -r -f1"c:\temp\mysetup.iss"
```

Important: No space between "f1" and "c".

where:

- *C:* is the location of your *adams_2024_2_windows64.exe* file
 - *f1* is a lower-case *f* and the number *1*
 - *c:\temp\mysetup.iss* is the location and name of the batch setup file
3. Select *OK*.
 4. Follow the installation instructions in the section, [Overview on page 63](#).
The batch installation file (*.iss*) is created.

To perform a batch installation:

1. Check the contents of the batch setup (*.iss*) file to make sure that it contains the correct installation directory location. For example, if it specifies *D:\Program Files\MSC.Software\Adams\2024_2* as the install directory, and you don't have a *D:* drive, you can change it to *C:\Program Files\MSC.Software\Adams\2024_2*. See [Sample setup.iss file on the next page](#).
2. In a command window, enter the following command:

```
C:\templadams_2024_2_windows64.exe -s -f1"c:\temp\mysetup.iss"
```

Important: No space between "f1" and "c".

where:

- *C:* is the location of your *adams_2024_2_windows64.exe* file
- *f1* is a lower-case *f* and the number *1*
- *c:\temp\mysetup.iss* is the location and name of the batch setup file.

Installing Adams on Windows

```
[InstallShield Silent]
Version=v7.00
File=Response File
[File Transfer]
OverwrittenReadOnly=NoToAll
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-DlgOrder]
Dlg0={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdWelcome-0
Count=10
Dlg1={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdCustomerInfo-0
Dlg2={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-MSC_SetupType3-0
Dlg3={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdStartCopy-0
Dlg4={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-MSC_License-0
Dlg5={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-0
Dlg6={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-1
Dlg7={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-2
Dlg8={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-3
Dlg9={D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdFinish-0
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdWelcome-0]
Result=1
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdCustomerInfo-0]
szName=builadm
szCompany=MSC Software Corporation
nvUser=1
Result=1
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-MSC_SetupType3-0]
szDir=C:\Program Files\MSC.Software\Adams\2024_1
Result=301
SetupType=501
SetupName=Full
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-SdStartCopy-0]
Result=1
[Application]
Name=Adams
Version=18.1.0
Company=MSC Software Corporation
Lang=0009
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-MSC_License-0]
szEdit1=27500@yoda
Result=1
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-0]
Result=1
Sel-0=1
Sel-1=0
[ {D6D7D44A-7056-4EAF-9B63-2691B41583DA}-AskOptions-1]
Result=1
Sel-0=1
Sel-1=1
Sel-2=1
```

Figure 1 Sample setup.iss file

6

Licensing on Windows

- [Overview](#)
- [Licensing Basics](#)
- [Specifying your License](#)
- [Replacing Codes \(Licenses\) on an Existing Windows Server](#)
- [Customizing End-User License Administration](#)

Overview

Adams products use a license server to manage the access to its products. Therefore, before you can run the products you just installed, you must license them. The next sections explain more about Adams licensing, the initial licensing options, and how you can manage the licensing after you've initially licensed the products.

- [Licensing Basics on the next page](#)
- [Specifying your License on page 83](#)
- [Replacing Codes \(Licenses\) on an Existing Windows Server on page 84](#)
- [Customizing End-User License Administration on page 85](#)

Licensing Basics

You can license Adams products in the following ways:

- *Set up a license server* that is available to your users through the network, and set up the number of users who can use Adams. The number of users who can run Adams concurrently depends on the number of licenses you purchased. Refer to your password certificate for information on the number of users who can run Adams.

You can run the license server on one machine or on three. We strongly recommend that you use a one-server configuration, however. If you select a three-server configuration, the machines act as backups to the other machines. You must install passwords on all of the server machines to set up a three-server configuration.

You can select to load only the licensing tools on the license server and install the Adams products only on the clients.

You also can set up the licensing so that it is locked to a particular machine or node. If your Adams licensing is node-locked, then users can only run Adams products on that machine. To see if you have purchased node-locked licensing, refer to your password certificate.

- *Set up a client* using an existing license server.

In both cases, the procedure for licensing Adams is the same.

Specifying your License

You typically specify the license for Adams during the installation procedure (see Step on [63](#)). However, you can modify the license type, location, or name at any time following the installation.

If you already installed Adams on your network and have a license server running, you can enter the hostname and TCP/IP port number of the license server to run Adams from that license server.

For Adams installations, the TPC/IP port number defaults to 27500 and is in the following format, where *hostname* is the name of the host:

27500@hostname

If you do not know the name of the host, enter the command *hostname* at a command prompt. Or, you can refer to the *SERVER* line of your password certificate/license file.

To specify or modify Adams licensing:

1. From the *Start* menu, point to *Programs*, point to *Adams 2024.2*, and then select *Settings & License*.
2. Select *Licensing*.
3. In the *licenseFile* field enter the name of the license server or the path to your license file.
4. Select *OK*.

Replacing Codes (Licenses) on an Existing Windows Server

Follow these steps if you have an existing Adams installation and have received new codes (as a renewal, change, and so on).

To update your passwords:

1. Place the new codes as a license file in the same directory as the existing *license.dat* file. Name it *license_new.dat*. Change the *SERVER* and *DAEMON* lines in the new license file to include the same port number, server name, and paths as the existing file. For example:

SERVER server1 123465 27500

DAEMON MSC c:\Program Files\MSC.Software\MSC.Licensing\XX.x\MSC.exe

Where *XX.x* is a current version. For example:

c:\Program Files\MSC.Software\MSC.Licensing\11.13\MD.exe.

2. Use Windows Explorer to rename the existing *license.dat* file to *license_old.dat*, and the new file to the current license file name (*license.dat*).
3. Run *Imtools.exe*, and then select *Config Services*.
4. Select the appropriate license server in the box below (if you have more than one).
5. Select the *Start/Stop/Reread* tab.
6. Select *ReRead License File*.

This should re-read the *license.dat* file and enable your new licenses. If there is a problem, or if the licenses are still not available, restart the system.

Customizing End-User License Administration

You can use the daemon options file provided with the license manager to customize the installation. This option file allows the end-user to:

- Reserve licenses for specified users or groups of users.
- Restrict the use of the software to certain people.
- Set software time-outs.
- Log activity for use with an optional report writer.

7 Running Adams Products

- [Starting Adams Products](#)
- [Setting Preferences](#)
- [Setting Your Working Directory](#)
- [Using Distributed Computing for Nonlinear Adams Flex Bodies](#)
- [High Performance Computing Considerations](#)

Starting Adams Products

This sections described how you can start your Adams products on Linux and on Windows.

Starting Adams Products on Linux

The Adams Toolbar is a starting point to using Adams products on Linux. The toolbar is shown below.

Adams Toolbar tool - Right click to set up Toolbar, manage memory models, access online help and Technical Support resources and more



Product tools - Click to run product or right-click to configure products and create user libraries.

Hold the cursor over a tool to see the name of the associated product.

Adams Toolbar

You can also use the Adams Toolbar to:

- Customize, keep track of, and organize multiple libraries of standard Adams products
- Create binaries
- Manage custom memory models and product preferences

For more information on these or other Adams Toolbar operations, see the Running and Configuring online help (from the *Help* menu in any product, select *Adams Help*, near the top of the pane on the left, select *Configuring Adams*).

To start a product on Linux:

1. To display the Adams Toolbar, at the command prompt, enter the command *adamsx* where *x* is the version number, for example *adams2024_2*.
2. Click on the tool representing the product you want to start.

Running Adams Products

Note:	We recommend that you use the Adams Toolbar to start your Adams products, but if you want to automate certain operations, use the text-based Program Menu. For more information, see the Running and Configuring online help.
--------------	---

Important:	<p><i>Remote access tools to Linux machine</i></p> <p><i>X terminal</i> is a display/input terminal for X Window System client applications. Many X terminal tools are available to display X client applications on remote Windows machines. Running Adams with such tools doesn't guarantee a good graphics experience for remote Linux OS machines. Hexagon recommends the use of NoMachine for the best chance of mitigating these issues.</p>
-------------------	--

Note:	<p>If Adams does not start or crashes on Linux SUSE VM, then set following environment variables to fix issue:</p> <ul style="list-style-type: none">• <code>__GLX_VENDOR_LIBRARY_NAME=mesa</code>• <code>LIBGL_ALWAYS_INDIRECT=1</code>
--------------	---

Starting Adams Products on Windows

You start any Adams product from the Start menu. You can also use the Start menu to:

- Change your license type
- Generate problem reports
- Set Adams preferences

For more information on these or other operations, see the Running and Configuring online help.

To start a product on Windows:


- From the **Start** menu, point to **Programs**, point to **Adams 2024.2**, point to the name of the product you want to start.

Note:	Adams start up command has been changed from " adams2024_2_x64 " to " adams2024_2 ". The " MSC.Software " folder from Start " All Programs " has been dropped."
--------------	---

Tip:	Select the corresponding desktop icon for the product, if you installed it on your desktop.
-------------	---

To start a product from DOS shell in Windows:

- Start → Programs → Adams 2024.2 → Command Prompt.
- An alternative is to add the /bin directory under the Adams installation directory to your user PATH environment variable. You can do this via the Control Panel:
 - a. Type *environment* in the Control Panel search box.
 - b. Select the *Edit environment variables for your account* pick.

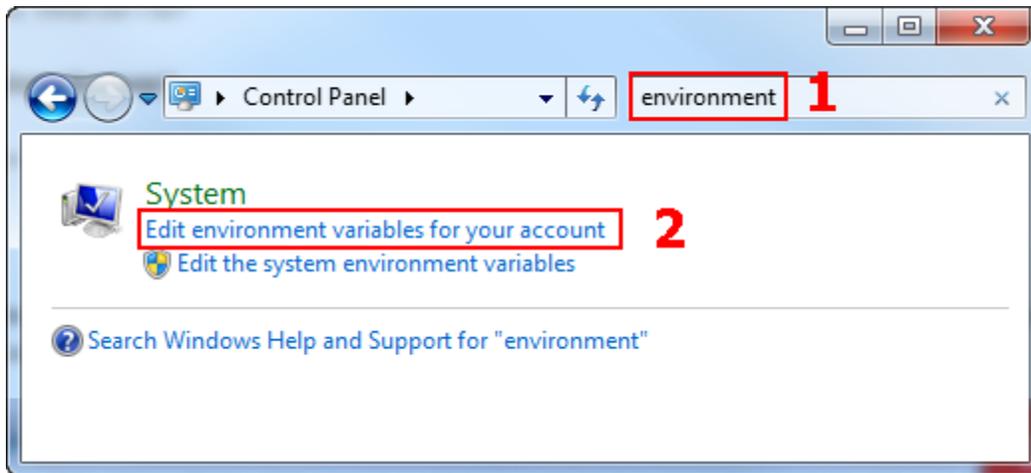

Navigation to Edit Environment Variables

- Check to see if you already have a PATH variable defined under “*User variables*”. If it exists then edit it, add a semicolon “;” to the end of the existing value, and then add the “bin” directory under the Adams installation directory. Otherwise select *New...*, use PATH for the variable name and add the “bin” directory under the Adams installation directory as the value. The default location of this directory is:
C:\Program Files\MSC.Software\Adams\2024_2_XXXXXX\bin
(where XXXXXX denotes the build number)
- Once you are done click *OK*.

Note:

Windows appends your User PATH to the System PATH environment variable, so there is no need to copy the existing System PATH variable to your user PATH variable. This behavior is unique to the User PATH variable. For all other environment variables, a User variables definition overrides a System Variables definition.

Running Adams Products

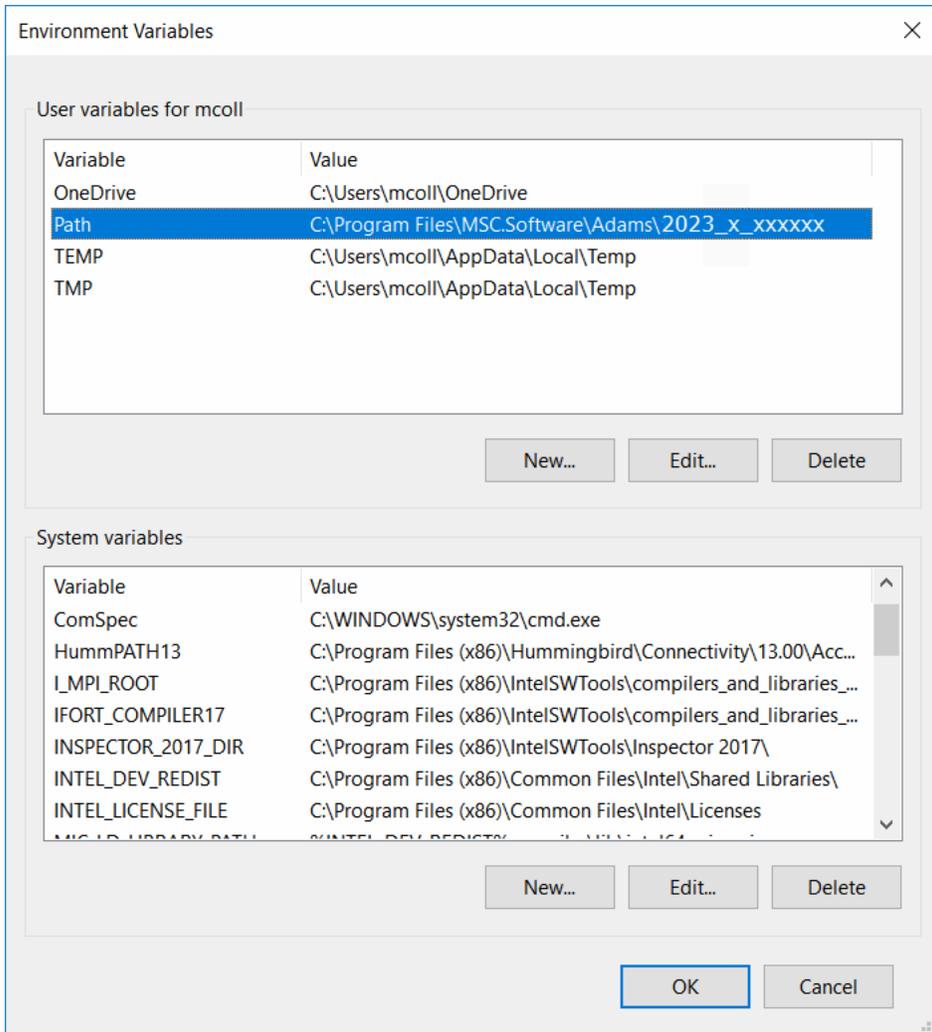


Figure 1 Editing Environment Variables

Setting Preferences

This section describes how you can set preferences, such as your working directory, graphics setting, and memory model size.

Setting Preferences on Linux

You use the Adams Registry Editor from the Adams Toolbar to set a variety of preferences. For information on the preferences you can set, see the Running and Configuring online help.

To display the Registry Editor:

- From the Adams *Toolbar*, right-click any product tool, and then select *Change <Product Name> Settings*.

Setting Preferences on Windows

You use the Settings menu to modify:

- Graphics settings
- Licensing
- Memory model size

To display the Settings dialog box:

- From the *Start* menu, point to *Programs*, point to *Adams 2024.2*, and then select *Settings & License*.

Setting Your Working Directory

During a session in a default or custom product, you can select the directory where you want to place your model and output files.

For Adams View, you can set the working directory from the Welcome dialog box.

To set your working directory:

1. From the *File* menu, select *Select Directory*.
2. In the dialog box that appears, select the working directory.

Using Distributed Computing for Nonlinear Adams Flex Bodies

Overview

When constructing a model containing nonlinear flexible bodies using Adams MaxFlex the model can be configured to distribute the computing effort across multiple hosts by specifying Compute Resource hostnames for the nonlinear flex bodies. A prerequisite for a simulation utilizing Compute Resource hosts is that those hosts have been properly configured.

Before an Adams simulation is able to utilize distributed computing some network daemons must be started. On a host on the local network a process called a Directory Service Server needs to be running. In addition, a process called a Starter Daemon needs to be running on each compute host. When needed the Starter Daemon process on a compute host will start one or more NLFE services. The figure below shows a diagram of the relationship between Adams Solver, the network daemons, and the NLFE service.

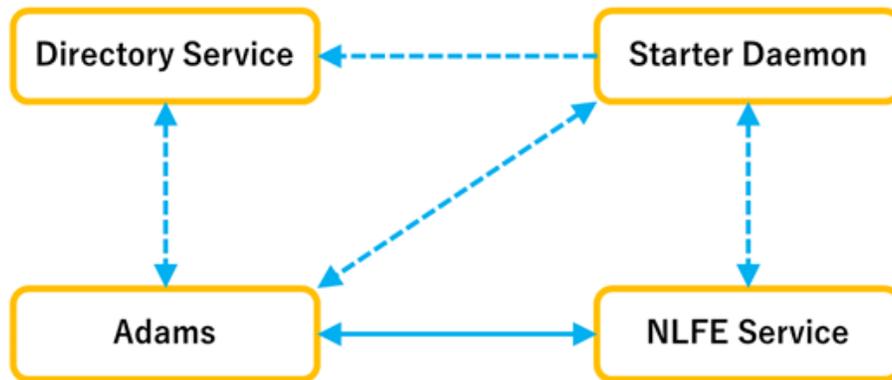


Figure 1 Adams Solver, Network Daemons and NLFE service links

The **Directory Service** runs in a thread inside client kernel and is listening. This functions as a broker between the Adams Solver process and the Starter Daemon on an external host. The Starter Daemon registers itself with the Directory Service when it starts. The Directory Service keeps a list of registered hosts along with their credentials. Later when Solver is connecting to an external host it starts by contacting the Directory Service to obtain the host's credentials. The Directory Service runs automatically when required.

The **Starter Daemon** is a process that, when requested, starts up instances of services installed on a remote host. Adams utilizes the Starter Daemon to start the NLFE service when required. A running Starter Daemon is needed on each host that an Adams model utilizes. Only one Starter Daemon should be run on any given host.

Note:

The KSH is required for running Adams MaxFlex (NLFE) simulations on Linux. Some Linux systems may not include this shell by default so be sure to install it using the following or similar command: `yum install ksh`

Adams- NLFE Client Manager

The Adams NLFE Client Manager is a tool used to start and stop the Starter Daemon on a host.


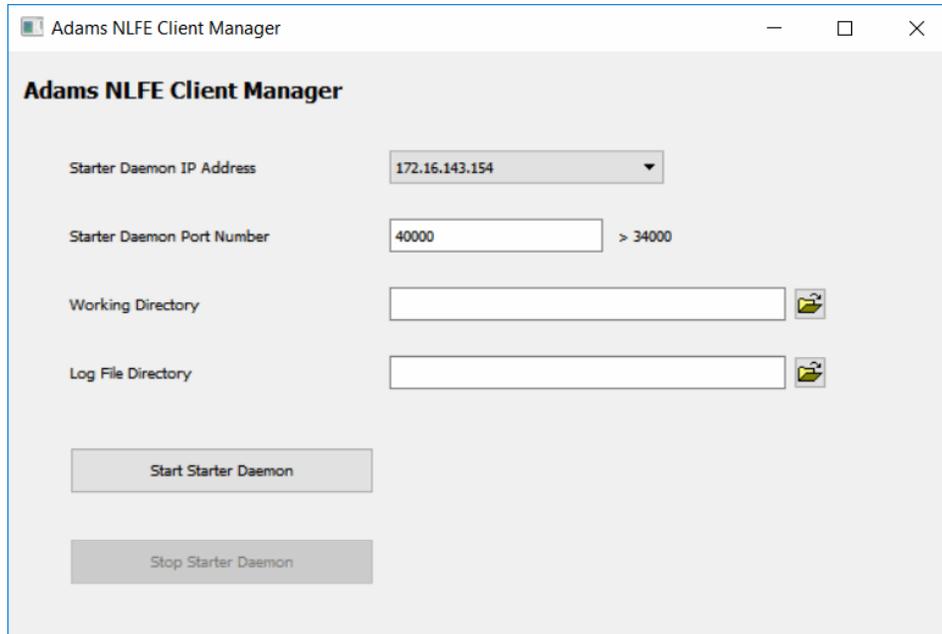


Figure 2 Adams NLFE Client Manager Dialog Box

Starting Adams - NLFE Client Manager

On Windows start the Client Manager from the Windows menu:

Running Adams Products

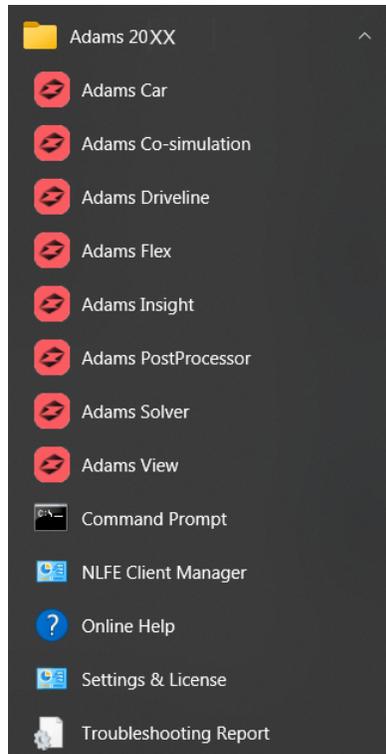

Starting Adams - NLFE Client Manager

%: adams<version> -clientmanager

Where, <version> is replaced with the actual string of the version of Adams installation, that is, 2024_2.

Starting a Starter Daemon

Start a Starter Daemon by logging onto the host where the demon is to run and starting the Adams NLFE Client Manager. Then specify a Starter Daemon IP Address, Port Number, enter or browse for a Working Directory, enter or browse for a Log Directory, and then push the "Start Starter Daemon" button. After a few seconds the Start Starter Daemon button will become grayed out and the Stop Starter Daemon button becomes enabled. For best performance, the Working Directory should be on a fast physical drive on the host machine. IP Address is set automatically but you may need to change it if it's not suitable when the machine has multiple addresses. The default of the Working Directory is the current directory and the Log Directory is the Working Directory. The process name for the Starter Daemon is SDServer. After you have started the daemon close the Client Manager.

Running Adams Products

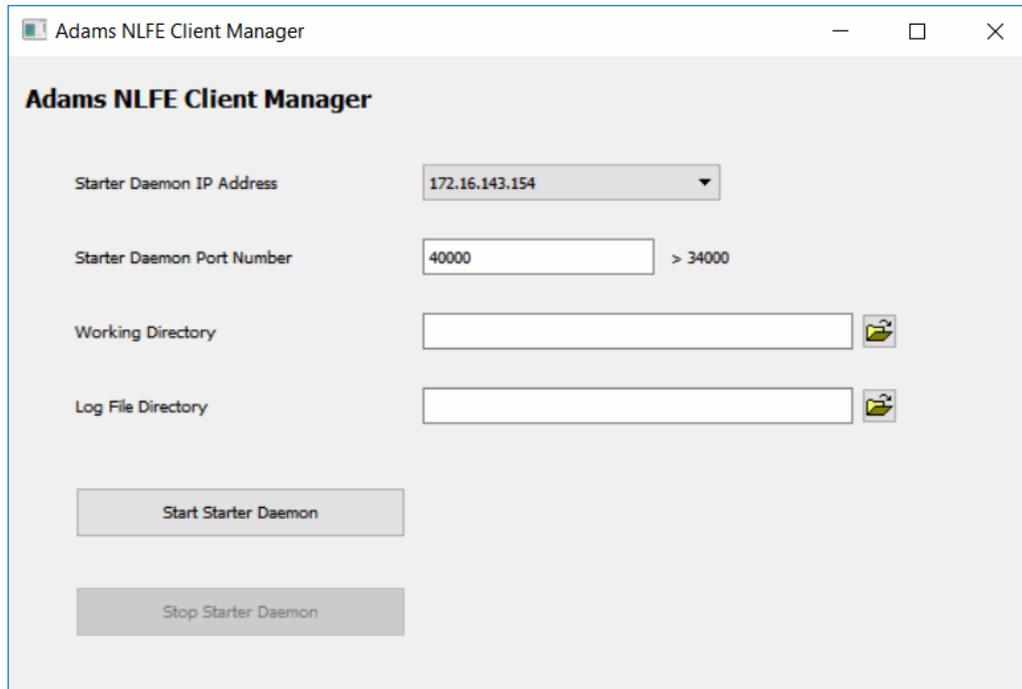


Figure 3 NLFE Client Manager: Start and Stop Starter Daemon

IP Address and Port Number of Directory Service and Starter Daemon

IP Address and Port Number have to be defined correctly for the communication between Directory Service and Starter Daemon. The IP Address field is a pull-down menu of valid IP addresses. IP Address is set automatically on both services and Port Numbers of Directory Service and Starter Daemon are set to 45000 and 40000 as default, respectively. If the machine has multiple addresses and the IP Address is not suitable or the Port Number is busy, both can be changed as follows.

- Directory Service (Adams platform)
Set the environment variables in ACF file, MSC_ADAMS_NLFE_SET_DSADDR and MSC_ADAMS_NLFE_SET_DSPORT respectively. The applied values can be shown as DS_ADDR and DS_PORT in DSC.xml file that is exported in the current directory during the analysis.
- Starter Daemon (NLFE platform)
Change the values using the NLFE Client Manager. One needs to stop the daemon first, change the values and then start again. When the Port Number is changed (to something other than the default of 40000), it's required to specify the number via the COMPUTE_RESOURCE option in a FLEX_BODY statement, for example:

```
FLEX_BODY/5  
, MATRICES = 1, 2, 3, 4  
, BDF_FILE = sample.dat  
, COMPUTE_RESOURCE = linux_box:42000
```

Running Adams Products

Add a colon (":") between the machine name and the Port Number as shown above.

High Performance Computing Considerations

Intel® SpeedStep for Windows 10

For computers running Windows 10 we have found Intel's SpeedStep to be enabled by default. Furthermore, we have mixed results in Adams Solver performance in our testing of the SpeedStep setting. Some models run slightly faster, but other models run slightly slower when SpeedStep is enabled versus disabled. Thus, we cannot make a recommendation for SpeedStep setting on Windows 10. We suggest keeping the default (Enable) unless you have another reason to disable it. In which case, depending on the model you may only see a slight increase or decrease in Solver performance.

When SpeedStep is enabled, another setting called Minimum Process State is available in Processor Power Management. In our testing we have found that between 5% (default setting for Balanced Power Management) and 100% (default setting for High Performance), there is essentially no difference in Adams speed.

Intel® Hyper-Threading Technology

Intel® processors provide a logical setting for hyper-threading technology (HTT) that can use physical CPU resources more efficiently. Logical processors are the number of physical cores times the number of threads that can run on each core through the use of HTT. Currently, HTT supports two threads per core, so on a 4-core processor, one can have 8 logical processors with HTT activated.

Adams and even the operating system does not provide an option to control the setting of HTT. This can only be done in the BIOS. Most of not all modern systems that employ an Intel logical processor has this setting activated by default.

In our testing it has been found that Adams simulation speeds may improve up to 20% with HTT turned OFF due to the additional logical overhead in HTT. Thus, for Adams performance, it is recommended to have HTT turned OFF in general. One can view the current setting of HTT using the `lscpu` command on Linux, or from the Windows Task Manager.

8 Linux Administration and Configuration

- [Overview](#)
- [Setting Up the Client Machine](#)
- [Updating Passwords](#)

Overview

This chapter describes some basic administration and configuration operations you might want to perform after you install the Adams products, and others that you might need to perform periodically as you obtain new passwords. These operations include the following:

- [Setting Up the Client Machine on the next page](#)
- [Updating Passwords on page 102](#)

Setting Up the Client Machine

If you did not install the Adams software as root, you need to make Adams available to all the users by creating a link from a user directory to the installation directory.

To set up a client machine:

1. Mount the Adams installation directory from the central file server to each machine that is going to run Adams.
2. Create a startup command on **each** user's machine in the directory of your choice, using the commands:

```
ln -s /install_dir/mdi adams2024_2
```

This link must be created in a directory that is in the user's path. Check the Path environment variable to see the directories that are already in the user's path.

Updating Passwords

If you receive new passwords from Hexagon, follow the instructions below to update your passwords. If you receive new software along with the passwords, you should follow the complete installation instructions in [on page 34](#)

Note:	If the license server started with root, you must be root to stop and start it.
--------------	---

The following are two ways to update your passwords:

- [Using the Adams Installation Script below](#)
- [Updating Outside the Installation Script below](#)

Using the Adams Installation Script

To update passwords using the installation script:

1. Log on to the Adams license server.
2. Move to Adams installation directory.
3. Start the installation program *INSTALL.ADAMS*.
4. At the prompt, enter *3* to select the option, *Stop the Adams license server(s)*.
5. At the prompt, enter *1* to select the option, *Install Adams passwords on this license server*.
6. Enter the new passwords by entering the name of the file containing the passwords.
7. At the prompt, enter *2* to select the option, *Start the Adams license server on this machine*.

Updating Outside the Installation Script

To update passwords outside the installation script:

1. Place the new codes as a license file in the same directory as the existing *license.dat* file. Name it *license_new.dat*. Change the *SERVER* and *DAEMON* lines in the new license file to include the same port number, server name, and paths as the existing file. For example:


```
SERVER server1 123465 27500
DAEMON MSC /msc/flexlm/bin/md
```
2. Rename the existing *license.dat* file to *license_old.dat*, and rename the new file to the current license file name (*license.dat*):


```
# mv license.dat license_old.dat
# mv license_new.dat license.dat
```
3. Use the *lmreread* command to force the *lmgrd* daemon to reset using the new license file.


```
# flexlm_install_dir/lmreread -c <path>/license.dat
```

 where *flexlm_install_dir* is the directory where FLEXlm is installed.

Note:

If you do not have an *Imreread* executable, copy *lmdown* and name it *Imreread*

You should now be able to run Adams products using the new licenses. If this fails, kill and restart the daemons as follows:

```
# flexlm_install_dir/lmdown -c <path>/license.dat
```

```
# flexlm_install_dir/lmgrd -c <path>/license.dat
```

9 Troubleshooting

- [Overview](#)
- [Troubleshooting on Windows](#)
- [Troubleshooting on Linux](#)

Overview

This chapter describes how to generate problem reports to send to Adams Technical Support. It also lists some common problems that can occur when installing, updating, and running Adams software, and recommends solutions to those problems.

- [Troubleshooting on Windows on the next page](#)
- [Troubleshooting on Linux on page 109](#)

If you do not find your problem in this chapter or if the recommended solution does not solve your problem, then:

- Refer to the Adams Technical Articles at <http://simcompanion.hexagon.com>
- Contact Adams Technical Support as explained in [Getting Help on page 21](#).

Troubleshooting on Windows

Generating Problem Reports

You can generate a report that examines your system configuration and places important debugging information in the file *adams_problem_report.txt*. If you have problems running Adams, you can generate this report and review it or send it to Adams Technical Support by fax or e-mail. As you review the report, refer to the sections in this chapter for explanations of many of the error messages that appear in the report.

Note:

For correct results, you must run the problem report from the license server, not the client machine.

To generate and review a report:

1. From the *Start* menu, point to *Programs*, point to *Adams 2024.2*, and then select *Troubleshooting Report*.
Adams creates a problem report in your home directory.
2. To review the report, open it into a text editor, such as Notepad.

Obtaining New Passwords


If you need new passwords, you can obtain them by calling your Hexagon Sales Administrator.

When requesting new passwords, provide the following information:

- Request number and Schedule 1 number (*Sched 1 #*) from your password certificate. The request number is at the top of the certificate and the Schedule 1 number is in the *Administrative Information* section.
- System ID and host name of your CPU. Instructions for obtaining this information for your particular CPU are in the hardware and software specifications.

Windows Security Alert

By default, all newer Windows operating systems enable the Windows Firewall to block certain common software interaction patterns frequently used within Adams. So, when running Adams products for the first time with this installation you might get a Windows security alert like the ones shown below (users with administrator privileges will see something like the image on the left; other users will see something like the image on the right).

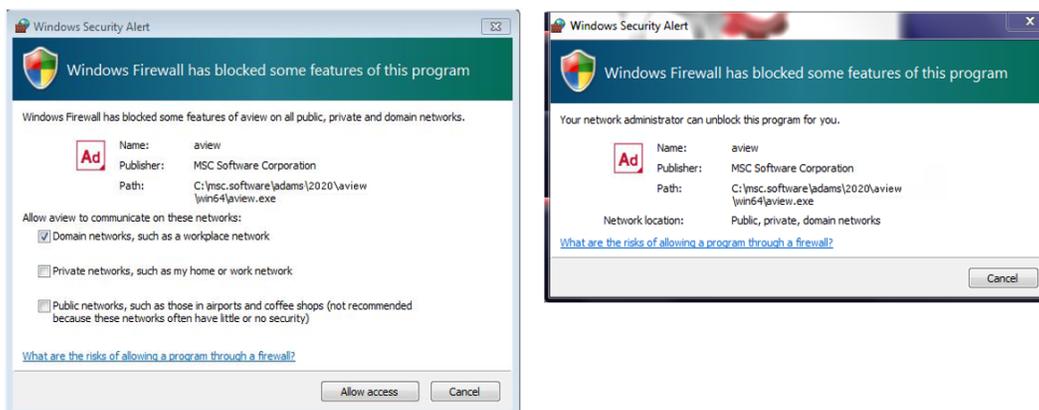

Windows Security Alert

The actions, when run for the first time in a given installation of Adams, known to MSC to trigger this alert are:

- Launch of Adams View or Adams View based products like Adams Car and Adams Driveline; Windows security alert will reference "aview"
- Creation of linear (modal) flexible body via Adams ViewFlex; Windows security alert will reference "remotebootstrap.exe"
- Creation of a nonlinear flexible body via import of a BDF; Windows security alert will reference "remotebootstrap.exe"
- Execution of a co-simulation via the Adams Co-simulation Interface (ACSI); Windows security alert will reference "ACSI_Gui.exe"

To fix this permanently, click **Allow access**. This will add the particular Adams component (for example, "aview" or "remotebootstrap.exe") to the Windows Firewall **Allowed Program** list and this dialog will no longer display for the given version of Adams installed on the machine. Note that you need an Administrator access to make this change.

To manage the Windows Firewall on your machine go to **Control Panel** → **Windows Firewall**.

Non-ASCII Character User Names

Adams supports ASCII characters in the setting of adams working directory. It does not allow non-ASCII characters in the temporary path set for Adams.

In case of non-ASCII character machine profile user name, use below workaround:

- Set the working directory path that contains only ASCII characters user name
- Set the environment variables TEMP/TMP that contains only ASCII characters directory path

Font Cache Directory

Launching Adams PostProcessor and creating pages in it takes a very long time on Windows Adams installations using client-server architecture using SAMBA with ADMIN privilege (or With Restricted User Profile). The issue is related to the font information cache files for applications using *fontconfig* file for their font handling. The fonts directory is scanned for font files. A cache is created which contains properties of

Troubleshooting

each font and the associated filenames. By default, the font cache directory is created when Adams is installed.

Font cache directories created using SAMBA get admin privileges applied. Other users will not have writable permission to this folder which is required to launch Adams 2018 PostProcessor and later versions.

The workarounds are:

- Delete the cache folder from the installation directory, so that Adams will recreate cache folder in the user profile directory.
- Have an admin change the permissions of this folder in installation directory, so that other users could overwrite this file.

Troubleshooting on Linux

Generating Reports and Verifying Software

The installation program provides two options for performing troubleshooting operations.

- *Generate a problem report* - Examines your system configuration and places important debugging information in the file *PROBLEM.RPT*. If you have problems running Adams, you can generate this report and review it or send it to Adams Technical Support by fax or e-mail.

Note:

For accurate results, you must run the problem report from the license server, not the client machine.

- *Check hostid on the system* - Returns the hardware identification number from the system that is used for Adams licensing. This identification number is also included in the problem report.

To generate a problem report:

- From the installation program menu, enter *5* to select the option, *Generate a problem report*. If you do not have write permission in the working directory, you will be prompted to enter another directory in which to write the files.

To check hostid on the system:

- From the installation program menu, select *6* to select the option, *Check hostid on this system*.

Obtaining New Passwords

If you need new passwords, you can obtain them by calling your Hexagon Sales Administrator.

Please provide the following information:

- License agreement number and Schedule 1 number (*Sched 1 #*) from your password certificate. The license agreement number is in the License Contract Information section of the password certificate and the Schedule 1 number is in the *Administrative Information* section of the password certificate.
- System ID and host name of your CPU. Instructions for obtaining this information for your particular CPU are in the hardware and software specifications.

About License Server System Resources

The Adams license server runs two processes: *lmgd* and *MSC*. These processes do not require significant CPU use even for a large number of licenses.

Each time an Adams product talks to the license daemons, a process file descriptor is used. It is very rare that normal Adams license transactions would use up all of the available process file descriptors. The process file descriptor is allocated by a TCP socket. If you have a large number of licenses (200+), you should confirm that the number of sockets and process file descriptors limitations for your system is adequate to handle all of the licenses. See your operating system's documentation for the maximum number of file descriptors available on the system designated as your Adams license server.

Troubleshooting

The license server writes a debug log file as it runs. It writes an entry for each license request and return. If the file becomes too large, you can edit the log file periodically.

The Adams license daemons send small amounts of data across the network. Each license transaction requires approximately 1 KB of data. If there are a lot of transactions (in the hundreds), the network bandwidth use can become significant. If this happens, you should consider keeping the license server on the same local area network as the one being used for the Adams products.

Allocating Disk Space for Temporary Files

You can change the location of temporary files created when running Adams. By defining the environment variable *TMPDIR*, you can point to a file system that has enough disk space to hold your temporary files. You must select a file system that has space and a directory that you have write permissions for. For example, if you are using a Linux C-shell you would add the following line to your *.cshrc* file:

```
setenv TMPDIR /new_location
```

10

Linux Installation

Roadmaps

- [Overview](#)
- [File Server, License Server, and Client - Same Machine](#)
- [File Server and License Server - Same Machine, Client - Different Machine](#)
- [File Server and Client - Same Machine, License Server - Different Machine](#)
- [File Server, License Server, and Client - Different Machines](#)
- [File Server - Different Machine, License Server and Client - Same Machine](#)
- [Different Linux Platforms - Heterogeneous Network](#)

Overview

This appendix describes the overall steps or roadmaps that you perform to install Adams products depending on your network configuration. Use these roadmaps to guide your installation. For complete installation and licensing instructions, see for more information. The roadmaps are:

- [File Server, License Server, and Client - Same Machine on the next page](#)
- [File Server and License Server - Same Machine, Client - Different Machine on page 114](#)
- [File Server and Client - Same Machine, License Server - Different Machine on page 115](#)
- [File Server, License Server, and Client - Different Machines on page 116](#)
- [File Server - Different Machine, License Server and Client - Same Machine on page 117](#)
- [Different Linux Platforms - Heterogeneous Network on page 118](#)

For assistance in determining which roadmap to follow, see [Table 3-1](#) . It lists the seven types of configurations and the page that contains the roadmap for performing installation and licensing for that type of configuration. If your configuration is not in the table, review the options in each chapter and choose the ones that best fit your needs.

Table 3-1 Types of Installation and License Configuration

If the file server is:	The license server is:	The client is:	Then follow roadmap on:
Same machine	Same machine	Same machine	113
Same machine	Same machine	Different machine	114
Same machine	Different machine	Same machine	115
Different machine	Different machine	Different machine	116
Different machine	Same machine	Same machine	117
Differing Linux platform(s) on any of the machines (heterogeneous network)			118

File Server, License Server, and Client - Same Machine

This type of installation is typical of a single machine on a network. Only one engineer uses Adams so the installation is placed on that person's machine.

Table 3-1 Roadmap When All Same Machine

Do the following:	For more information, see the section:
1. Log on to the Adams user's workstation.	--
2. Create an installation directory.	Creating the Installation Directory on page 37
3. Install Adams.	Installing Adams on page 38
4. Install network passwords.	Licensing Adams When File and License Server Are Same Machine on page 56
5. Start the license server.	Starting the Adams License Server on page 58
6. Modify the system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
7. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

File Server and License Server - Same Machine, Client - Different Machine

This type of installation is typical of larger networks, where there may be one-to-many Adams users. Because there is more than one Adams user, a central server is used as both file server and license server. The Adams users work on personal machines, and access the software across the network using NFS.

Table 3-1 Roadmap When Only Client Different

Do the following:	For more information, see the section:
1. Log on to the central server.	--
2. Create an installation directory.	Creating the Installation Directory on page 37
3. Install Adams.	Installing Adams on page 38
4. Install network passwords.	Licensing Adams When File and License Server Are Same Machine on page 56
5. Start the license server.	Starting the Adams License Server on page 58
6. Modify the system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
7. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

File Server and Client - Same Machine, License Server - Different Machine

This type of installation is typical of a large network where central servers have been designated as license servers. Adams users work on personal machines and access the software locally to increase performance

Table 3-1 Roadmap When Only License Server Different

Do the following:	For more information, see the section:
1. Log on to the Adams user's workstation.	--
2. Create an installation directory.	Creating the Installation Directory on page 37
3. Install Adams.	Installing Adams on page 38
4. Exit from the installation program.	--
5. Log on to the license server machine.	--
6. Create a directory for Adams on the license server.	Creating the Installation Directory on page 37
7. Install Adams.	Installing Adams on page 38
8. Install network passwords, which unloads license software.	Licensing Adams When File and License Server Are Different Systems on page 57
9. Start the license server.	Starting the Adams License Server on page 58
10. Modify the system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
11. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

File Server, License Server, and Client - Different Machines

This type of installation is typical of a large network where central servers have been designated as file servers and license servers. Adams users work on personal machines, and access the software across the network using NFS.

Table 3-1 Roadmap When All Different Machines

Do the following:	For more information, see the section:
1. Log on to the central NFS server.	--
2. Create an installation directory.	Creating the Installation Directory on page 37
3. Install Adams.	Installing Adams on page 38
4. Exit from the installation program.	--
5. Log in to the license server machine.	--
6. Create a directory for Adams on the license server.	Creating the Installation Directory on page 37
7. Install Adams.	Installing Adams on page 38
8. Install network passwords, which unloads license software.	Licensing Adams When File and License Server Are Different Systems on page 57
9. Start the license server.	Starting the Adams License Server on page 58
10. Modify the system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
11. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

File Server - Different Machine, License Server and Client - Same Machine

This type of installation is typical of a medium-sized network where a departmental NFS server is used. A single Adams user works on a personal machine, and accesses the software across the network through NFS. The Adams user's machine also acts as the license server.

Table 3-1 Roadmap When License Server and Client are the Same Machine

Do the following:	For more information, see the section:
1. Log on to the central NFS server.	--
2. Create an installation directory.	Creating the Installation Directory on page 37
3. Install Adams.	Installing Adams on page 38
4. Exit from the installation program.	--
5. Log on to license server and client.	--
6. Mount Adams installation directory from file server on license server system through NFS.	--
7. Create a directory for Adams on this machine.	Creating the Installation Directory on page 37
8. Install Adams	Installing Adams on page 38
9. Install network passwords.	Licensing Adams When File and License Server Are Different Systems on page 57
10. Start the license server.	Starting the Adams License Server on page 58
11. Modify system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
12. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

Different Linux Platforms - Heterogeneous Network

This situation is similar to the previous, except that multiple platforms may be involved. The license server can be Linux or Windows. However, the file servers must be homogeneous. In other words, the Linux file servers can only serve Linux clients, and Windows file servers can only serve Windows clients. You can use different Linux platforms for clients as long as the files for their platforms have been loaded onto the file server. Note that you may experience degraded performance for a Windows client due to network issues

Table 3-1 Roadmap for Heterogeneous Network

Do the following:	For more information, see the section:
1. Log in to the central NFS server.	--
	Installing Adams on page 38
	--
2. Repeat Steps 1 through 4 for any additional platforms and file servers.	--
3. Log in to the license server machine.	--
4. Create a directory for Adams on this machine.	Creating the Installation Directory on page 37
5. Install Adams	Installing Adams on page 38
6. Install network passwords.	Licensing Adams When File and License Server Are Different Systems on page 57
7. Start the license server.	Starting the Adams License Server on page 58
8. Modify the system startup procedures so they include the restarting of the Adams license manager.	Restarting the Adams License Daemons on page 59
9. Generate a troubleshooting report to verify that all products and files were properly installed.	Verifying a Successful License on page 61

11

dSPACE SCALEXIO® Configuration guide for Adams Real Time

In order to run Adams FMU on dSPACE, you will need to update the SCALEXIO firmware to 2021-A, install dSPACE Hypervisor extension, and configure a Linux based virtual machine for running inside the dSPACE Hypervisor extension. The following steps will guide you through this process.

1. Acquire new flashcard from dSPACE to configure SCALEXIO for 2021-A and update firmware. Contact dSPACE Support for more information.
2. Installation of Hypervisor and Ubuntu 22.04 OS

https://www.dspace.com/en/pub/home/support/documentation.cfm?helpsetid=SCALEXIOHypervisorExtensionGuide&externalid=Topic_97d999d8-e66f-4bda-be85-b6939d7c9ffe_--_&Language=en-us&Release=RLS2021-A

Note:

You will need a my dSPACE ID to access the link above.

Contact dSPACE support for assistance with Installation of Hypervisor and the Ubuntu Operating System

3. Setting up network and DNS on Ubuntu 22.04
DNS Servers - (Ask your IT for latest information on this if not known)
DNS suffix - (Ask your IT for latest information on this if not known)
Gateway - (Ask IT for latest information on this if not known)

4. Ubuntu VM configuration

Refer to the following link in the dSPACE 2021-A User Manual for configuration of Ubuntu VM. It is highly recommended to use Ubuntu 22.04 to run Adams.

dSPACE SCALEXIO® Configuration guide for Adams Real Time

https://www.dspace.com/en/pub/home/support/documentation.cfm?helpsetid=SCALEXIOHypervisorExtensionGuide&externalid=Topic_0b5482a1-82f0-4aa8-b7c8-4bd067a981c8_--&Language=en-us&Release=RLS2021-A

Note: You will need a mydSPACE ID to access the link above.

Note that at a minimum, the RTOS (linux32) needs 2 CPUs to run. Adams requires at least 2 CPUs to run on Ubuntu OS. However, Adams will run faster if more cores are assigned to Ubuntu OS.

5. Setup a shared filesystem between Ubuntu and 32-Bit Linux OS

Refer to the following link in the dSPACE 2021-A User Manual.

https://www.dspace.com/en/pub/home/support/documentation.cfm?helpsetid=SCALEXIOHypervisorExtensionGuide&externalid=Topic_1eab0357-12cb-4dac-b817-243222eb2dfa_--&Language=en-us&Release=RLS2021-A

Note: You will need a mydSPACE ID to access the link above.

6. Install Hypervisor Tools on Ubuntu for shared memory Libraries

Refer to the following link in the dSPACE 2021-A User Manual.

https://www.dspace.com/en/pub/home/support/documentation.cfm?helpsetid=SCALEXIOHypervisorExtensionGuide&externalid=Topic_15a0a029-c9b7-4f32-a6b8-d08b28ab381e_--&Language=en-us&Release=RLS2021-A

Note: You will need a mydSPACE to access the link above.

7. Shared Memory Configuration Setup for Adams

Adams requires two shared memory partitions with id 1 and id 2 of size 16384 for each. In the VM configuration it would look something like this:

```
"shared_memory" : [  
  {  
    // unique ID of this shared memory on this platform  
    "id" : 0,  
    // Size in Bytes of the shared memory region  
    "size" : 134184960,  
  },  
  {  
    "id" : 1,  
    "size" : 16384,  
  },  
  {  
    "id" : 2,  
    "size" : 16384,  
  }  
],
```

8. Settings on Ubuntu to Improve Real Time Performance

- Enable RT_PREEMPT in the KERNEL (Requires building the kernel from source code).

dSPACE SCALEXIO® Configuration guide for Adams Real Time

- Isolate specific CPUs for real-time (Do note that the last CPU in Ubuntu OS is used by the Adams main thread)
- Isolate interrupts to a specific CPU
- Disable Ubuntu Desktop UI
- Disable automatic updates for Ubuntu
- Additional Hypervisor configuration ("allowIOServiceCore")

To accomplish the above steps please refer to the document "Configuration of Virtual Machines for usage with the dSPACE Hypervisor Extension" which can be obtained from dSPACE support.

9. Run a simple example application to check the settings for Realtime performance. Please contact dSPACE support for an example application.

"Start the application inside the VM first (sh start_shm_server.sh). It also contains a simple script to route the corresponding shared memory irq or ethernet irq to the correct core.

The test application will print information on the round trip time for the interrupt from the SCALEXIO to the VM and back."

The output looks something like this:

```
Info 2021-08-23 16:52:02 VM Call: min: 5.8145 us, avg: 6.3570 us, max:
8.1595 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:52:01 VM Call: min: 5.8312 us, avg: 6.3682 us, max:
8.2464 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:52:00 VM Call: min: 5.8248 us, avg: 6.3919 us, max:
8.2155 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:59 VM Call: min: 5.8362 us, avg: 6.3906 us, max:
8.2753 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:58 VM Call: min: 5.8405 us, avg: 6.3555 us, max:
8.3262 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:57 VM Call: min: 5.8348 us, avg: 6.4207 us, max:
8.2561 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:56 VM Call: min: 5.7578 us, avg: 6.4093 us, max:
8.4046 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:55 VM Call: min: 5.7952 us, avg: 6.4470 us, max:
26.2536 us (total max: 9.6531 us) (0/0)
Info 2021-08-23 16:51:54 Application started.
Info 2021-08-23 16:51:54 VM Shared Memory with ID 0 communication
initialized (0/0)
Info 2021-08-23 16:51:54 VM Shared Memory with ID 0 opened. (0/0)
Info 2021-08-23 16:51:54 RTH Test Application (0/0)
Info 2021-08-23 16:51:54 Application loaded.
```

If the virtual machine is setup correctly, this will run forever without task overruns and jitter < 30 us.

10. Install pre-requisites for installing and running Adams on Ubuntu 22.04

To install all the prerequisites to run Adams, execute the following command in a terminal:

```
sudo apt install gcc g++ libsm6 libxrender1 libfontconfig1 tcsh libnss3 libnspr4 libxau6 gfortran p7zip
libpng-dev
```

11. Install Adams on Ubuntu 22.04

Use the REDHAT 8.8 installer to install Adams on Ubuntu 22.04 OS. To install Adams from Ubuntu Terminal, type the following command from the location containing the Adams installer file:

```
./adams_2024.2_linux64_rh8.8_a.bin --mode console
```

12. Install Adams License

The license servers will work only if the DNS suffix is set correctly. Contact Adams Support for setting up the Adams License.

dSPACE SCALEXIO® Configuration guide for Adams Real Time

Guidelines for OS settings on Ubuntu 22.04 on dSPACE hypervisor for real-time performance

Interrupts settings

The information provided here is a supplement to the document provided by dSPACE called “Configuration of Virtual Machines for usage with the DSPACE Hypervisor Extension”. This section describes steps and lists the scripts (provided by dSPACE) to route interrupts to ensure best real-time performance.

To find out the active interrupts, type the following command in the terminal

```
cat /proc/interrupts
```

The output should look something similar to this which shows the list of interrupts and the cores they are active on

```
    CPU0 CPU1 CPU2 CPU3 CPU4 CPU5
0: 0      0      0      0      0      0      IO-APIC   2-edge    timer
1: 68     139     0      0      0      0      IO-APIC   1-edge    i8042
6: 0      3      0      0      0      0      IO-APIC   6-edge    floppy
8: 1      0      0      0      0      0      IO-APIC   8-edge    rtc0
9: 0      0      0      0      0      0      IO-APIC   9-fasteo  acpi
12: 2319  0      0      0      0      0      IO-APIC   12-edge   i8042
14: 0      0      0      0      0      0      IO-APIC   14-edge   ata_piix
15: 0      0      0      0      0      0      O-APIC    15-edge   ata_piix
24: 0      0      0      0      0      0      PCI-MSI   2113536-edge virtio2-config
25: 0      0      0      0      0      6352   PCI-MSI   2113537-edge virtio2-req.0
26: 0      0      0      0      0      0      PCI-MSI   3162112-edge virtio1-config
27: 65     0      0      0      0      0      PCI-MSI   3162113-edge virtio1-input.0
28: 11     92     0      0      0      0      PCI-MSI   3162114-edge virtio1-output.0
29: 1      0      0      0      0      0      PCI-MSI   65536-edge  ens4f0
30: 202    91     0      0      0      0      PCI-MSI   65537-edge  ens4f0-TxRx-0
31: 1955   0      0      0      0      0      PCI-MSI   65538-edge  ens4f0-TxRx-1
32: 1148   225    0      0      0      0      PCI-MSI   65539-edge  ens4f0-TxRx-2
33: 286    0      0      0      0      0      PCI-MSI   65540-edge  ens4f0-TxRx-3
34: 0      0      0      0      0      0      PCI-MSI   1081344-edge ivshmem-irq
35: 0      0      0      0      0      0      PCI-MSI   1097728-edge ivshmem-irq
36: 0      0      0      0      0      0      PCI-MSI   32768-edge  virtio0-config
37: 3103  0      0      0      0      0      PCI-MSI   32769-edge  virtio0-control
38: 0      0      0      0      0      0      PCI-MSI   32770-edge  virtio0-cursor
NMI:0     0      0      0      0      0      Non-maskable interrupts
LOC:15270 478    343    329    313    920    Local timer interrupts
SPU:0     0      0      0      0      0      Spurious interrupts
PMI:0     0      0      0      0      0      Performance monitoring interrupts
IWI:0     0      0      0      0      0      IRQ work interrupts
RTR:0     0      0      0      0      0      APIC ICR read retries
RES:3257  209    205    205    204    230    Rescheduling interrupts
CAL:0     901    901    901    901    900    Function call interrupts
TLB:0     0      0      0      0      0      TLB shootdowns
TRM:0     0      0      0      0      0      Thermal event interrupts
THR:0     0      0      0      0      0      Threshold APIC interrupts
DFR:0     0      0      0      0      0      Deferred Error APIC interrupts
MCE:0     0      0      0      0      0      Machine check exceptions
MCP:0     0      0      0      0      0      Machine check polls
HYP:0     0      0      0      0      0      Hypervisor callback interrupts
HRE:0     0      0      0      0      0      Hyper-V reenlightenment interrupts
HVS:0     0      0      0      0      0      Hyper-V stimer0 interrupts
ERR:0
MIS:0
PIN:0     0      0      0      0      0      Posted-interrupt notification event
NPI:0     0      0      0      0      0      Nested posted-interrupt event
PIW:0     0      0      0      0      0      Posted-interrupt wakeup event
```

Follow the steps in “Configuration of Virtual Machines for usage with the DSPACE Hypervisor Extension” to move an interrupt to a specific core. The “[Script 1 - startup_interrupt_aff_setting.sh](#)” moves most of the interrupts away from real-time cores (1-5 in this case) to the core 0.

dSPACE SCALEXIO® Configuration guide for Adams Real Time

Note:

There are some interrupts that cannot be moved. This calls another script to move the ethernet device to a real-time core, in this case it is core 5 where an adams process runs that uses this device. Adams uses this ethernet device during simulation for TCP/IP connection with the real-time application.

After moving the interrupts as necessary, execute the following command to list all the interrupts and make sure there are no unwanted interrupts on the real-time cores

```
cat/proc/interrupts
```

The output received can be compared with the previous output using a difftool, to verify that the activity of interrupts is isolated as required.

```

CPU0 CPU1 CPU2 CPU3 CPU4 CPU5
0: 0 0 0 0 0 0 IO-APIC 2-edge timer
1: 68 139 0 0 0 0 IO-APIC 1-edge i8042
6: 0 3 0 0 0 0 IO-APIC 6-edge floppy
8: 1 0 0 0 0 0 IO-APIC 8-edge rtc0
9: 0 0 0 0 0 0 IO-APIC 9-fasteo acpi
12: 2319 0 0 0 0 0 IO-APIC 12-edge i8042
14: 0 0 0 0 0 0 IO-APIC 14-edge ata_piix
15: 0 0 0 0 0 0 O-APIC 15-edge ata_piix
24: 0 0 0 0 0 0 PCI-MSI 2113536-edge virtio2-config
25: 0 0 0 0 0 6357 PCI-MSI 2113537-edge virtio2-req.0
26: 0 0 0 0 0 0 PCI-MSI 3162112-edge virtio1-config
27: 65 0 0 0 0 0 PCI-MSI 3162113-edge virtio1-input.0
28: 11 92 0 0 0 0 PCI-MSI 3162114-edge virtio1-output.0
29: 1 0 0 0 0 0 PCI-MSI 65536-edge ens4f0
30: 205 91 0 0 0 0 PCI-MSI 65537-edge ens4f0-TxRx-0
31: 1996 0 0 0 0 0 PCI-MSI 65538-edge ens4f0-TxRx-1
32: 1177 225 0 0 0 0 PCI-MSI 65539-edge ens4f0-TxRx-2
33: 289 0 0 0 0 0 PCI-MSI 65540-edge ens4f0-TxRx-3
34: 0 0 0 0 0 0 PCI-MSI 1081344-edge ivshmem-irq
35: 0 0 0 0 0 0 PCI-MSI 1097728-edge ivshmem-irq
36: 0 0 0 0 0 0 PCI-MSI 32768-edge virtio0-config
37: 3136 0 0 0 0 0 PCI-MSI 32769-edge virtio0-control
38: 0 0 0 0 0 0 PCI-MSI 32770-edge virtio0-cursor
NMI:0 0 0 0 0 0 Non-maskable interrupts
LOC:15366 480 347 331 318 920 Local timer interrupts
SPU:0 0 0 0 0 0 Spurious interrupts
PMI:0 0 0 0 0 0 Performance monitoring interrupts
IWI:0 0 0 0 0 0 IRQ work interrupts
RTR:0 0 0 0 0 0 APIC ICR read retries
RES:3261 211 207 207 206 234 Rescheduling interrupts
CAL:0 902 902 902 902 901 Function call interrupts
TLB:0 0 0 0 0 0 TLB shootdowns
TRM:0 0 0 0 0 0 Thermal event interrupts
THR:0 0 0 0 0 0 Threshold APIC interrupts
DFR:0 0 0 0 0 0 Deferred Error APIC interrupts
MCE:0 0 0 0 0 0 Machine check exceptions
MCP:0 0 0 0 0 0 Machine check polls
HYP:0 0 0 0 0 0 Hypervisor callback interrupts
HRE:0 0 0 0 0 0 Hyper-V reenlightenment interrupts
HVS:0 0 0 0 0 0 Hyper-V stimer0 interrupts
ERR:0
MIS:0
PIN:0 0 0 0 0 0 Posted-interrupt notification event
NPI:0 0 0 0 0 0 Nested posted-interrupt event
PIW:0 0 0 0 0 0 Posted-interrupt wakeup event

```

Note:

It is important to execute this script when the VM starts or before starting the real-time simulation as the settings would reset with every restart. This could

also be setup to be executed automatically when Ubuntu starts. Please refer to Ubuntu documentation for more information running a script at boot time

Scripts

The scripts provided in this document can be used directly by copying them to blank file with an extension of “sh” and enabling execute permissions.

- [Script 1 - startup_interrupt_aff_setting.sh](#)
- [Script 2 - route_veth_irq.sh](#)
- [Script 3 - route_shm_irq.sh](#)

Script 1 - startup_interrupt_aff_setting.sh

```
#!/bin/sh

# Be sure echo application runs on a real-time capable core
# => Be sure isolcpus=1 in this case needs is set for kernel boot
parameter

# move all irqs away from real-time core
IRQ_CPUS=1
for irqlist in $(ls /proc/irq/*/smp_affinity)
do
echo "$IRQ_CPUS"> $irqlist 2> /dev/null
done

# disable mtrr. this is only needed once
echo disable=0 > /proc/mtrr 2>/dev/null
echo disable=1 > /proc/mtrr 2>/dev/null

# move eth1 input irq to real-time core!
./route_veth_irq.sh enp6s1 5 1

# avoid workqueue threads on real-time processing cores..
# they conflict with the SOFTIRQ thread processing ethernet frames..
echo 1 > /sys/devices/virtual/workqueue/cpumask
echo 1 > /sys/devices/virtual/workqueue/writeback/cpumask

# udp echo version
LD_BIND_NOW=1 chrt -f 51 ./udp_echo
```

Script 2 - route_veth_irq.sh

The script below is the content of “route_veth_irq.sh” used in the above script to move the interrupts for the ethernet device to a real-time core. This needs 3 inputs the name of the device, core ID and softirq priority.

```
#!/bin/sh

# This shell script moves the virtio eth interrupt to a specific core
# and promotes the irq handler as well as the cores softirq thread to
real-time mode

# Ethernet Interface to route IRQ for
ETH_DEVICE=$1
# Core to route the IRQ to
CORE_ID=$2
# Priority of the threads processing ethernet frames on that core
SOFTIRQ_PRIORITY=$3

VIRTIO_DEV=$(basename $(readlink /sys/class/net/${ETH_DEVICE}/device))
```

dSPACE SCALEXIO® Configuration guide for Adams Real Time

```
echo Routing RX IRQs of device ${VIRTIO_DEV} to core ${CORE_ID}
IRQ_NUM=$(cat /proc/interrupts | grep ${VIRTIO_DEV}-input | cut -d: -f 1
| tr -d '[:space:]')
echo "Device uses IRQ ${IRQ_NUM}"
echo ${CORE_ID} > /proc/irq/${IRQ_NUM}/smp_affinity_list

SOFTIRQD_PID=$(pgrep ksoftirqd/${CORE_ID})
echo "Raising SOFTIRQ kernel thread [PID ${SOFTIRQD_PID}] to SCHED_FIFO
with priority ${SOFTIRQ_PRIORITY}"
chrt -f -p ${SOFTIRQ_PRIORITY} ${SOFTIRQD_PID}

VIRTIOIRQ_PID=$(pgrep irq/${IRQ_NUM}-)
echo "Raising IRQ kernel thread [PID ${VIRTIOIRQ_PID}] to SCHED_FIFO with
priority ${SOFTIRQ_PRIORITY}"
chrt -f -p ${SOFTIRQ_PRIORITY} ${VIRTIOIRQ_PID}
```

Script 3 - route_shm_irq.sh

The script below moves the shared memory interrupts to a specific core. This needs to be moved to a real-time core since adams uses shared memory in the hypervisor during simulation.

```
#!/bin/sh
# This shell script moves the virtio shm interrupt to a specific core
# shared memory id to route IRQ for
SHM_ID=$1
SHM_ID=$((SHM_ID+1))
SHM_PCI_PATH=/sys/bus/pci/devices/0000:02:0${SHM_ID}.0/msi_irqs

# Core to route the IRQ to
CORE_ID=$2

IRQ_NUM=$(ls /sys/bus/pci/devices/0000:02:0${SHM_ID}.0/msi_irqs)
echo "Shared Memory $1 uses IRQ ${IRQ_NUM}"
echo ${CORE_ID} > /proc/irq/${IRQ_NUM}/smp_affinity_list
```

Removing unused devices from the VM

It is important to remove unused devices from the VM so that interrupts for the device would not impact the real-time performance. This can be done by removing or commenting the line in the device section in the VM configuration file for dSPACE hypervisor.

For example, the devices section from a vmconf file is shown below.

```
// devices to pass exclusively to the VM
"devices" : [
// {
// "type" : "IGPU",
// "name" : "Integrated Graphics Device",
// },
// {
// "type" : "USB1",
// "name" : "USB Host Controller"
// },
// {
// "type" : "USB2",
// "name" : "USB Host Controller #2"
// },
// {
// "type" : "PCI Device",
// "name" : "My Custom PCI Device",
// "addr" : "02:00.0"
// },
{
// We may pass through Ethernet Channels by name
"type" : "Ethernet Channel",
```

dSPACE SCALEXIO® Configuration guide for Adams Real Time

```
"name" : "Eth0_1"  
},  
]
```

As can be seen above, the devices "Integrated Graphics Device", "USB Host Controller", "USB Host Controller #2" and "My Custom PCI Device" are commented out and hence will not start with the VM.

CPU shielding

CPU shielding should be performed before starting the application. It may or may not have an impact if the cores are already isolated. It is best to try this and verify the improvement in performance. It does not hurt to have this on top of isolating cores as mentioned in "Configuration of Virtual Machines for usage with the DSPACE Hypervisor Extension".

The steps are as follows:

1. To add the real-time cores to the shield, execute the following command in the terminal to shield cores 1-5.

```
cset shield --cpu 1-5
```

2. Launch the adams process using the shield as below.

```
cset shield --exec /home/mscsoftware/run_adams.sh
```

For example, run_adams.sh would look something like this.

```
#!/bin/sh  
/home/mscsoftware/adams/adams2024.2/mdi -c python  
/home/mscsoftware/adams/adams2024.2/controls/utils/adams_daemon.py -I  
192.168.2.15&
```

Example of usage of the scripts and workflow

Make sure [route_veth_irq.sh](#), [startup_interrupt_aff_setting.sh](#) and [run_adams.sh](#) are present in the same folder.

All of these steps could be combined to a single script as required.

1. Login as a root user by executing the following and enter the user password when prompted.

```
sudo su
```

2. Move all interrupts away from real-time cores and move eth interrupt to real-time core.

```
sh startup_interrupt_aff_setting.sh
```

3. Move shared memory interrupts to real-time core.

```
sh route_shm_irq.sh 1 5  
sh route_shm_irq.sh 2 5
```

4. Apply shielding to the real-time cores.

```
cset shield --cpu 1-5
```

5. Start adams through the shield.

```
cset shield --exec /home/mscsoftware/run_adams.sh
```

It is recommended to execute the adams program and scripts directly from the console prompt on the web interface for dSPACE SCALEXIO under Hypervisor Control in the "Console" tab as shown below.

Connected to virtual machine 10.59.81.80:5701

```
root@mscsoftware-Standard-PC-i440FX-PIIX-1996:/home/mscsoftware#
```

12 Adams Licensing Configurations for Real Time Systems

- [Licensing Configuration options](#)
- [MSC Licensing Usage Reporting Tool](#)

Licensing Configuration options

There are a few licensing configuration options for running Adams on a real time system such as Simulation Workbench from Concurrent or dSPACE SCALEXIO® depending on network access to the system and the amount of disruption that is to be avoided on the real time system. They are:

- [Node-Locked License File](#)
- [Licensing Server on Different Machine from the Real Time System](#)
- [Licensing Server Installed on the Real Time System](#)

Node-Locked License File

This option provides the best performance and least disruption when running Adams in real time. No licensing server is involved, so there is no dependence on networking requirements or speed.

Licensing Server on Different Machine from the Real Time System


This option requires network access and depending on network speed, one may incur a slowdown in starting Adams during initialization of the real time simulation. No performance slowdown is incurred during the simulation now that licensing heartbeat is disabled after initialization.

Licensing Server Installed on the Real Time System

This option is not recommended and may not be supported since installation or operation of the licensing server may not be officially supported on the RTOS. Also, this option may not be necessary since one typically runs only one simulation at a time on the real time system.

MSC Licensing Usage Reporting Tool

The MSC License server (Helium) comes with a feature to report periodically on licensing usage. The licensing usage reporting tool can interrupt Adams Real Time processes when it tries to upload the license report log files while a real time simulation is in progress. Thus, it is recommended to turn off usage reporting. This is done during Helium Setup when installing the licensing server by unchecking the “I agree to the automatic reporting of usage data” checkbox which is shown in the figure below as checked.

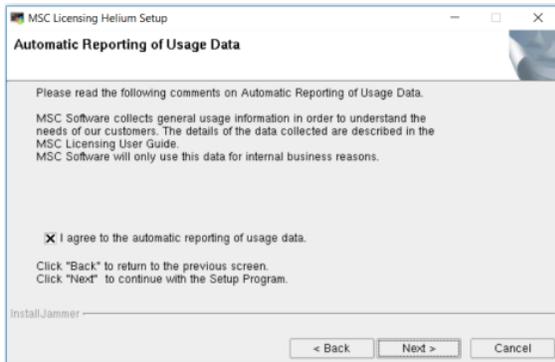

Unfortunately, there is no convenient way to turn off usage reporting after the licensing server is installed. Without having to re-install the licensing server, you can make a change to the *.ini file that is located on the server. There is a line in the *.ini file related to “uploader.” By removing this line no more licensing data will be uploaded, thereby removing the disruptions during real time simulations. Note that you will need to restart the Imgrd/license server process after making this change to the *.ini file.